

Compression wall seal

Project information


| | |
|--------------------------------|-----------------|
| Job name: | Location: |
| Engineer: | Date submitted: |
| Contractor: | Submitted by: |
| Manufacturer's representative: | Approved by: |

Technical data

| | |
|-------------------------|--------|
| Material | Rubber |
| Prop 65 label required? | Yes |

Product information and application use

Ecoflex® compression wall seals can be used with wall sleeves, or can be used alone where a field core drill is preferred. It creates a watertight seal between the core drill surface and the outer jacket of Ecoflex piping

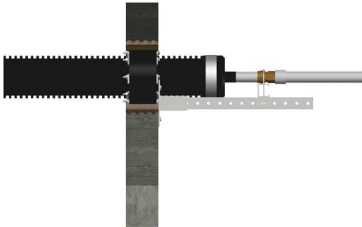

| Part name | Part no. | Subcomponent Material |
|---------------------------------------|----------|--|
| Compression Wall Seal for 2.7" Jacket | 1007358 | Hardware: Galvanized steel Rubber gasket: (EPDM) rubber |
| Compression Wall Seal for 5.5" Jacket | 1007360 | Hardware: Galvanized steel Rubber gasket: (EPDM) rubber |
| Compression Wall Seal for 6.9" Jacket | 1007361 | Hardware: Galvanized steel Rubber gasket: (EPDM) rubber |
| Compression Wall Seal for 7.9" Jacket | 1007362 | Hardware: Galvanized steel Rubber gasket: (EPDM) rubber |

Installation

For new concrete walls, install over the pipe and Ecoflex compression wall seals into the wall sleeve for a watertight seal. For an existing wall with a field core drill, install between core drill surface and outer jacket of the Ecoflex pipe. Refer to the Uponor Pre-insulated Pipe Systems Design and Installation Manual for more information.

Related applications

- Pre-Insulated Pipe Systems
- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems

Notes

- Core Drill OD - 4.75"
- Core Drill OD - 8"
- Core Drill OD - 10"

Footnotes

-

Contact information

| | |
|---|---|
| Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008 | Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517 |
|---|---|