# Rieles para tuberías PEX

## Project information


| | |
|---|---|
| Job name: | Location: |
| Engineer: | Fecha de envío: |
| Contractor: | Presentada por: |
| Manufacturer's representative: | Approved by: |

## Technical data

| | |
|---|---|
| Material | Plastic |
| Subcomponent Material | Polyethylene (post-consumer products) |

## Product information and application use

Plastic PEX Rail secures Uponor PEX tubing products to metal, concrete and wood support structures. Note: Suitable fastening hardware is required (not included).

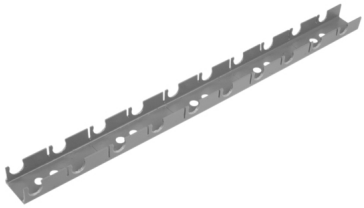

| | Part name | Part no. | Weight per UOM [lbs/UOM] |
|---|---|---|---|
| | 1/2" PEX Rail, 6.5 ft. | A5700500 | 1.1 |
| ✔ | 5/8" PEX Rail, 6.5 ft. | A5700625 | 1 |
| | 3/4" PEX Rail, 6.5 ft. | A5700750 | 1.35 |

## Installation

Lay out the tube rails parallel with the floor joists (perpendicular to the tubing layout direction). Space the rails 12 inches from the edge of the wall and 36 inches on center thereafter. Fasten the rails to the subfloor using 1" wood screws, liquid nails or silicone. Refer to the Uponor Radiant Installation Handbook for additional information.

## Related applications

Radiant Heating and Cooling Systems

Turf Conditioning Systems

Permafrost Prevention Systems

Snow and Ice Melt Systems

## Footnotes

-

## Contact information


Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517


© 2026 Uponor North America. All Rights Reserved