


Pipelines for Future-Proof Process Water Management

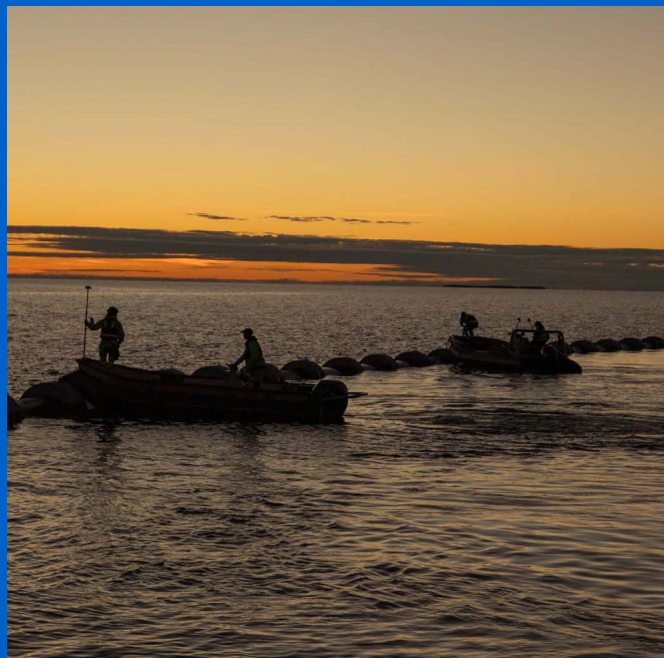

Implication d'Uponor

- ✓ Total pipeline: 12 350 m Pressure pipes
 - Intake pipeline: 300 m Pressure pipes PN10 DN1000
 - Distribution pipeline: 9200 m Pressure pipes PN10 DN800-900
 - Outfall pipeline: 2850 m Pressure pipes PN10 DN900
 - Special constructions: Diffusors for controlled water outtake. Intake screens. Poly-pigging systems for efficient cleaning and maintenance of the pipeline network
- ✓ Full performance responsibility for the entire system.
- ✓
 - Hydraulic design
 - Type drawings
 - Product drawings
 - Project drawings
 - Field welding
 - Ballasting
 - Submerging
 - Project management

Powering the Future of Process Water

To relocate treated process water discharge 10 kilometres from the mill, GF Infracore designed a robust offshore pipeline solution built for reliable operation and lasting performance.

When Nordic Paper in Bäckhammar, Sweden needed to relocate its discharge point for treated process water approximately 10 kilometres from the mill and around 3 kilometres offshore into the receiving water body, stringent requirements were placed on technology, performance, and operational reliability.

Connaissance du projet

Location	Achèvement des travaux
Bäckhammar, Sweden	2027
Type de construction	Product systems
Industrie	Constructions sur mesure, Tubes industriels
Type de projet	
Renovation	

Partenaires

T3 Group AB
Svensk Sjöentreprenad

Powering the Future of Process Water

When Nordic Paper in Bäckhammar, Sweden needed to relocate its discharge point for treated process water approximately 10 kilometres from the mill and around 3 kilometres offshore into the receiving water body, stringent requirements were placed on technology, performance, and operational reliability.

Through GF Infrawise specialist expertise in hydraulic design, submerged pipelines, and complex infrastructure, a tailor-made solution was developed that combines long service life, reliable operation, and proven functionality.

From Design to Functional Responsibility

GF Infrawise assumed full responsibility for its scope of supply within the project, from advanced hydraulic design and dimensioning to delivery and performance responsibility for the complete submerged pipeline system.

Challenges Addressed

- Relocation of the discharge point approximately 10 km from the industrial site
- Complex hydraulic conditions with demanding flow optimization requirements
- Need for a long-term solution with minimal maintenance requirements
- Safe installation and operation under challenging conditions

Delivered Solution

The completed solution comprises a total of 12 kilometres of pressure pipelines and several specially adapted components to ensure safe and efficient operation.





By combining robust PE piping systems with advanced hydraulic expertise, GF Infracore delivered a solution designed to meet future requirements.


Customer Benefits at a Glance

- Robust and reliable water management
- Long service life and low maintenance costs
- High operational reliability and dependable performance
- Optimized hydraulic efficiency

The result is a complete and highly reliable, submerged pipeline system that provides Nordic Paper with a long-term solution, enabling the company to operate with confidence and maintain full control well into the future.

Image Gallery Nordic Paper

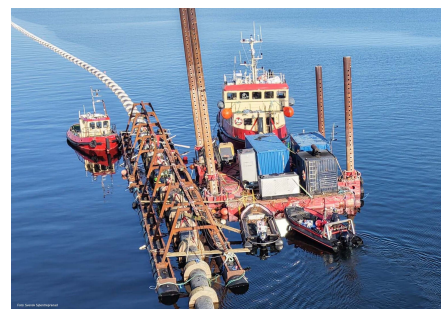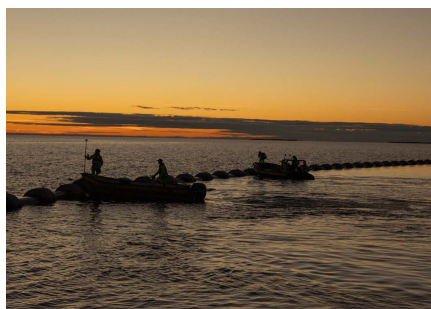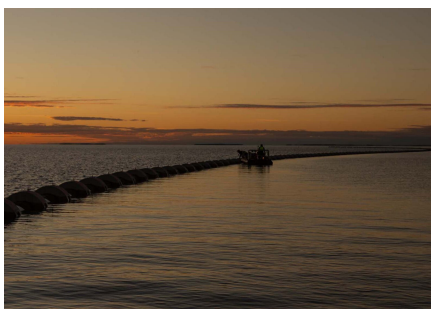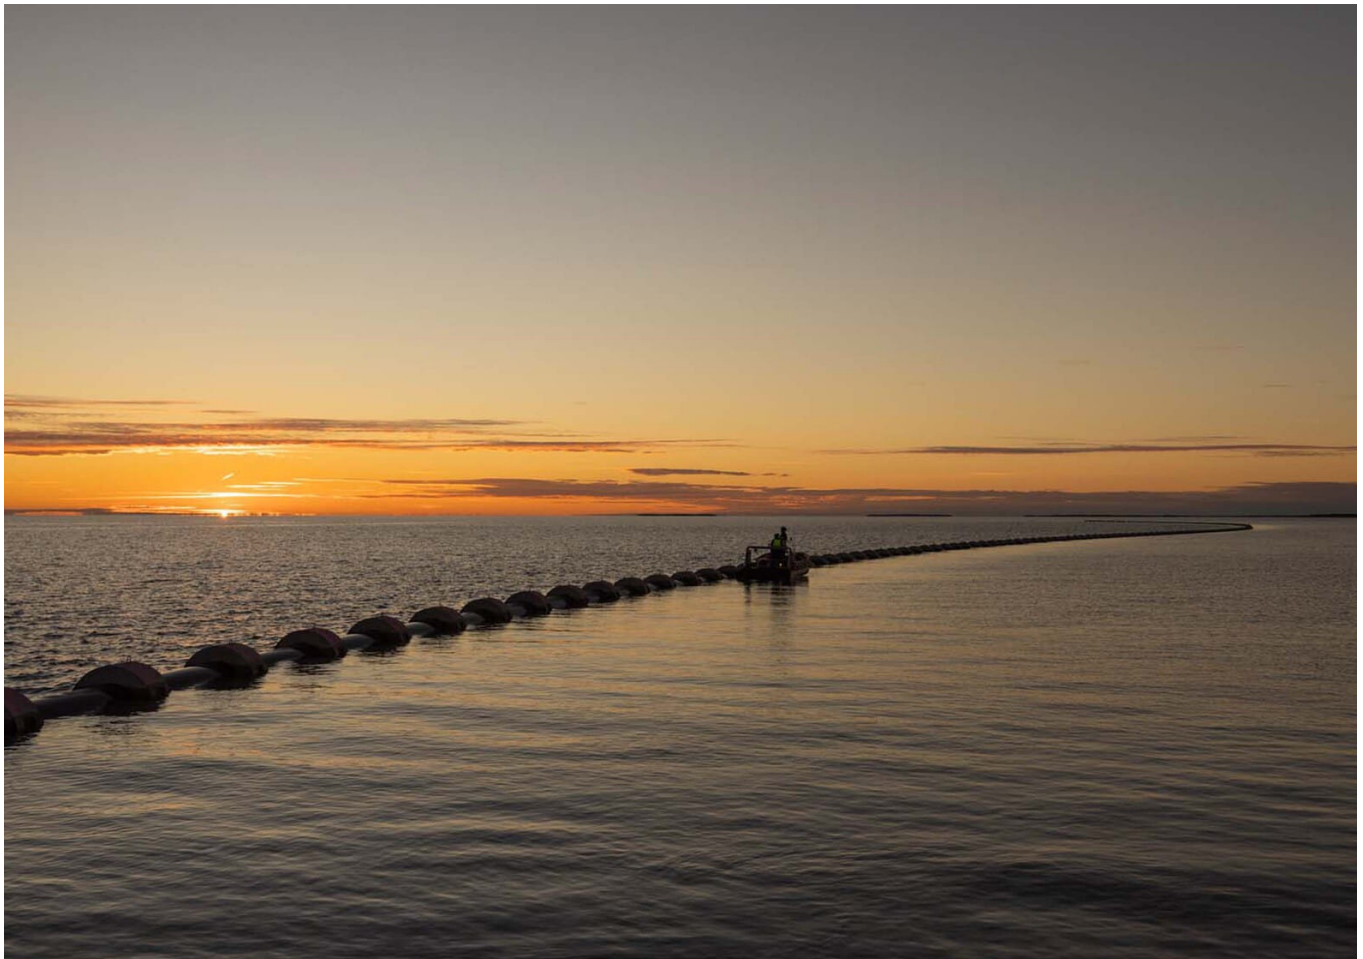

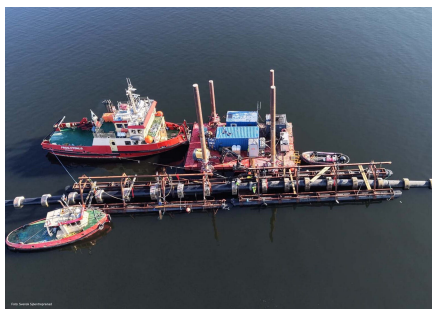

”

This project demonstrates the value of combining advanced hydraulic design with proven materials and full end-to-end responsibility throughout the entire process. The result is a reliable solution that meets both current and future demands,” says Petri Tähtinen, Sales Representative, GF Infrawise.

+GF+

Adresse

Uponor France
523 Cours du 3^e Millénaire
69800 Saint-Priest,
France

Téléphone +33 (0)4 74 95 70 70
W www.uponor.com