


ProPEX lead-free (LF) brass elbows (PEX and Male CU)

Project Information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	LF Brass
End type 1	BSPP 1/2"
End type 2	Sweat 1/2"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

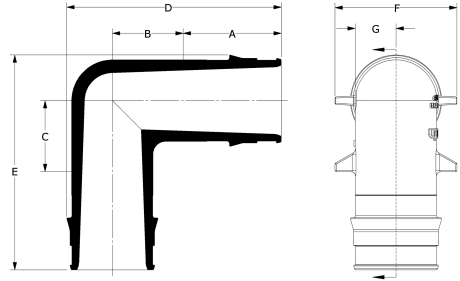

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Weight per UOM [lbs/UOM]
ProPEX LF Brass Elbow, 1/2" PEX x 1/2" Male CU	LF4730500	0.709	0.521	0.55	1.61	1.419	0.85	0.298	0.21

Part name	Part no.	Codes	Standards	Listings
ProPEX lead-free (LF) brass elbows (PEX and Male CU)	LF4730500	UPC IBC IRC IPC NPC of Canada UMC NSPC IMC	NSF-372 ASTM F877 ASTM F1960 CSA B137.5 NSF-61 NSF-14	IAPMO-ES ICC PMG 1006 cNSFus-pw-G U.P.Code

Installation	Related applications
-	-

Footnotes	Contact information
-	<p>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</p> <p>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</p>