
# EP flow-through multi-port tees

## Project information

| | |
|---|---|
| Job name: | Location: |
| Engineer: | Date submitted: |
| Contractor: | Submitted by: |
| Manufacturer's representative: | Approved by: |

## Technical data

| | |
|---|---|
| Material | Engineered Polymer |
| End type 3 | ProPEX 1/2" |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar) |
| | 180 °F (82 °C) at 100 psi (6.9 bar) |
| | 200 °F (93 °C) at 80 psi (5.5 bar) |

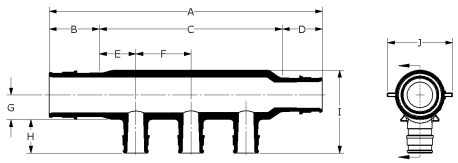


## Product information and application use

Engineered polymer (EP) flow-through multi-port tees feature 3⁄4" or 1" ProPEX® inlets with 1⁄2" ProPEX branch outlets.1 The tees are made of EP, a high-performance material used in demanding, hot-water applications

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

| | Part name | Part no. | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | I [inch] | J [inch] |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | EP Flow-through Multi-port Tee, 2 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2227557 | 4.41 | 0.955 | 2.5 | 0.955 | 0.625 | 1.25 | 0.54 | 0.719 | 1.696 | 1.22 |
| | EP Flow-through Multi-port Tee, 3 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2237557 | 5.79 | 0.955 | 3.88 | 0.955 | 0.69 | 1.25 | 0.54 | 0.719 | 1.696 | 1.22 |
| | EP Flow-through Multi-port Tee, 3 (1/2") outlets, 1" x 3/4" ProPEX | Q2231057 | 6.196 | 1.191 | 4.05 | 0.955 | 0.775 | 1.25 | 0.6 | 0.719 | 1.879 | 1.48 |
| | EP Flow-through Multi-port Tee, 4 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2247557 | 6.91 | 0.955 | 5 | 0.955 | 0.625 | 1.25 | 0.48 | 0.625 | 1.639 | 1.22 |
| ✔ | EP Flow-through Multi-port Tee, 4 (1/2") outlets, 1" x 3/4" ProPEX | Q2241057 | 7.146 | 1.191 | 5 | 0.955 | 0.625 | 1.25 | 0.57 | 0.719 | 2.009 | 1.441 |
| | EP Flow-through Multi-port Tee, 6 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2267557 | 9.41 | 0.955 | 7.5 | 0.955 | 0.625 | 1.25 | 0.457 | 0.719 | 1.624 | 1.18 |
| | EP Flow-through Multi-port Tee, 6 (1/2") outlets, 1" x 3/4" ProPEX | Q2261057 | 9.646 | 1.191 | 7.5 | 0.955 | 0.625 | 1.25 | 0.57 | 0.719 | 2.009 | 1.441 |
| | EP Flow-through Multi-port Tee, 6 (1/2") outlets, 1" x 1" ProPEX | Q2261051 | 9.882 | 1.191 | 7.5 | 1.191 | 0.625 | 1.25 | 0.57 | 0.719 | 2.009 | 1.441 |
| | EP Flow-through Multi-port Tee, 4 (1/2") outlets, 1" x 1" ProPEX | Q2241051 | 7.682 | 1.191 | 5.3 | 1.191 | 0.775 | 1.25 | 0.6 | 0.719 | 1.879 | 1.48 |

| | Part name | Part no. | Cv Through | Equivalent length through [ft] | End Type 1 | End Type 2 | End Type 4 | Weight per UOM [lbs/UOM] |
|---|---|---|---|---|---|---|---|---|
| | EP Flow-through Multi-port Tee, 2 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2227557 | 15.3 | 1.57 | ProPEX 3/4" | ProPEX 3/4" | - | 0.07 |
| | EP Flow-through Multi-port Tee, 3 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2237557 | 14.2 | 2 | ProPEX 3/4" | ProPEX 3/4" | ProPEX | 0.1 |
| | EP Flow-through Multi-port Tee, 3 (1/2") outlets, 1" x 3/4" ProPEX | Q2231057 | 11.6 | - | ProPEX 1" | ProPEX 3/4" | - | 0.13 |
| | EP Flow-through Multi-port Tee, 4 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2247557 | 13.8 | 2.18 | ProPEX 3/4" | ProPEX 3/4" | ProPEX | 0.12 |
| ✔ | EP Flow-through Multi-port Tee, 4 (1/2") outlets, 1" x 3/4" ProPEX | Q2241057 | 11.7 | - | ProPEX 1" | ProPEX 3/4" | - | - |
| | EP Flow-through Multi-port Tee, 6 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2267557 | 13.2 | 0 | ProPEX 3/4" | ProPEX 3/4" | - | 0 |
| | EP Flow-through Multi-port Tee, 6 (1/2") outlets, 1" x 3/4" ProPEX | Q2261057 | 11.8 | - | ProPEX 1" | ProPEX 3/4" | - | - |
| | EP Flow-through Multi-port Tee, 6 (1/2") outlets, 1" x 1" ProPEX | Q2261051 | 25.1 | 0 | ProPEX 1" | ProPEX 1" | - | 0 |
| | EP Flow-through Multi-port Tee, 4 (1/2") outlets, 1" x 1" ProPEX | Q2241051 | 29.3 | - | ProPEX 1" | ProPEX 1" | - | 0.18 |

© 2026 Uponor North America. All Rights Reserved

| Part name | Part no. | Codes | Standards | Listings |
|---|---|---|---|---|
| EP flow-through multi-port tees | All | UPC\|IBC\|IRC\|IPC\|NPC of Canada\|UMC\|NSPC\|IMC | ASTM E814/ULC S115\|ASTM F877\|ASTM F1960\|CSA B137.5\|ULC S102.2\|ASTM E119/UL 263\|NSF/ANSI/CAN 61\|ULC S101\|NSF/ANSI 14 | IAPMO-ES\|HUD MR 1269\|ICC-ES-PMG\|cNSFus-pw\|UL\|U.P.Code\|cQAIus P321 |
| In addition, the following parts have additional codes, standards, or listings: | | | | |
| EP Flow-through Multi-port Tee, 4 (1/2") outlets, 3/4" x 3/4" ProPEX | Q2247557 | | | |

| Installation | Related applications |
|---|---|
| For a mounting bracket, use any product designed to mount 1" copper pipe for the ¾" EP flow-through multi-port tees or 1¼" copper pipe for the 1" EP flow-through multi-port tees. For more information, refer to the Uponor Piping Systems Installation Guide. | PEX-a Plumbing Systems |

| Footnotes | Contact information | |
|---|---|---|
| - | Uponor Inc.<br>5925 148th Street West<br>Apple Valley, MN 55124<br>T 800.321.4739<br>F 952.891.2008 | Uponor Ltd.<br>6510 Kennedy Road<br>Mississauga, ON L5T 2X4<br>T 888.594.7726<br>F 800.638.9517 |

© 2026 Uponor North America. All Rights Reserved