


Concealed sprinklers

Project information

| | |
|--------------------------------|-----------------|
| Job name: | Location: |
| Engineer: | Date submitted: |
| Contractor: | Submitted by: |
| Manufacturer's representative: | Approved by: |

Technical data

| | |
|-------------------------|--|
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar) |
| Prop 65 label required? | Yes |

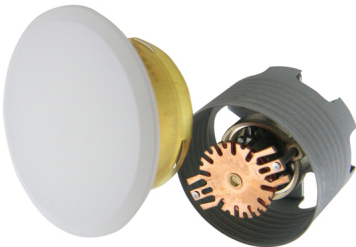

| Part name | Part no. | A [inch] | B [inch] | Material group | End Type 1 | End Type 2 | End Type 3 | Weight per UOM [lbs/UOM] |
|--|-----------|----------|----------|----------------|------------|------------|------------|--------------------------|
| LF RC-RES (162F) Flat Concealed Sprinkler | LF74970FC | - | - | - | - | - | - | 0.36 |
| LF RC-RES (205F) Flat Concealed Sprinkler with White Cover Plate | LF74971FW | 0 | 0 | LF Brass | ProPEX | ProPEX | FNPT | 0.39 |

| Installation | Related applications |
|--------------|-------------------------------|
| - | AquaSAFE™ Fire Safety Systems |

| Footnotes | Contact information |
|-----------|---|
| - | <div>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</div> <div>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</div> |