
Concealed sprinklers

Project information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

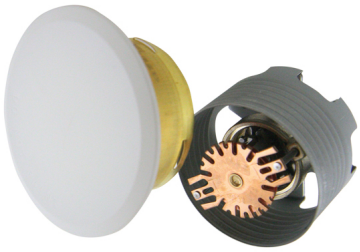

	Part name	Part no.	A [inch]	B [inch]	Material group	End Type 1	End Type 2	End Type 3	Weight per UOM [lbs/UOM]
	LF RC-RES (162F) Flat Concealed Sprinkler	LF74970FC	-	-	-	-	-	-	0.36
	LF RC-RES (205F) Flat Concealed Sprinkler with White Cover Plate	LF74971FW	0	0	LF Brass	ProPEX	ProPEX	FNPT	0.39

Installation

-

Related applications

AquaSAFE™ Fire Safety Systems

Footnotes

-

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved