


# EP branch opposing-port multi-port tees

## Project information

|                                |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Date submitted: |
| Contractor:                    | Submitted by:   |
| Manufacturer's representative: | Approved by:    |

## Technical data

|                         |  |
|-------------------------|--|
| Material                | Engineered Polymer   |
| End type 1              | ProPEX 3/4"  |
| End type 2              | ProPEX 1/2"  |
| End type 3              | ProPEX 1/2"  |
| End type 4              | ProPEX 1/2"  |
| Temp/pressure ratings   | 73 °F (23 °C) at 160 psi (11 bar)<br>180 °F (82 °C) at 100 psi (6.9 bar)<br>200 °F (93 °C) at 80 psi (5.5 bar) |
| Prop 65 label required? | No   |

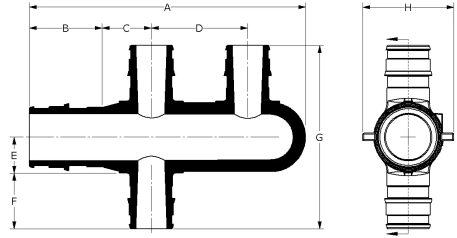

## Product information and application use

Engineered polymer (EP) branch opposing-port multi-port tees feature a 3/4" ProPEX® inlet with opposing 1/2" ProPEX branch outlets.<sup>1</sup> These are designed for a central location to facilitate piping in two directions.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

| Part name   | Part no. | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | Weight per UOM [lbs/UOM] |
|---|----------|----------|----------|----------|----------|----------|----------|----------|----------|--------------------------|
| 3/4" EP Branch Opposing-port Multi-port Tee, 3 (1/2") outlets | Q2337550 | 0.141    | 0.955    | 0.625    | 1.25     | 0.467    | 0.719    | 2.373    | 1.18     | 0.07                     |
| 3/4" EP Branch Opposing-port Multi-port Tee, 4 (1/2") outlets | Q2347550 | 3.58     | 0.955    | 0.625    | 1.25     | 0.467    | 0.719    | 2.373    | 1.18     | 0.07                     |

| Part name                               | Part no. | Codes                                      | Standards   | Listings  |
|---|----------|--|---|---|
| EP branch opposing-port multi-port tees | All      | UPC IBC IRC IPC NPC of Canada UMC NSPC IMC | ASTM E814 ULC S115 ASTM F877 ASTM F1960 CSA B137.5 ULC S102.2 ASTM E119 UL 263 NSF/ANSI/CAN 61 ULC S101 NSF/ANSI 14 | IAPMO-ES HUD MR 1269 ICC-ES-PMG cNSFus-pw UL U.P.Code cQAlus P321 |

## Installation

Use any product designed to mount 1" copper pipe as a mounting bracket. For more information, refer to the Uponor Piping Systems Installation Guide.

## Related applications

PEX-a Plumbing Systems

## Footnotes

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517