

# PEX clips

## Project information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

## Technical data

Material	Plastic
Subcomponent Material	Nylon

## Product information and application use

Uponor PEX Clips are designed to suspend crosslinked polyethylene (PEX) tubing below the underside of a subfloor in a joist cavity installation.

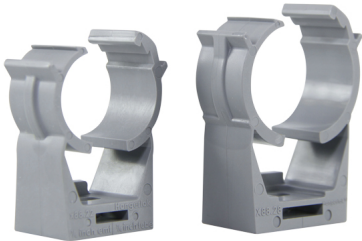

Part name	Part no.	A [inch]	B [inch]	C [inch]	Prop 65 label required?	Weight per UOM [lbs/UOM]
3/8" PEX Clip, 100/pkg.	F7060375	0.685	1.14	1.613	-	0.015
1/2" PEX Clip, 100/pkg.	F7051258	0.685	1.14	1.676	-	0.016
3/4" PEX Clip, 100/pkg.	F7057500	0.685	1.386	1.912	Yes	0.018
1" PEX Clip, 50/pkg.	F7051001	0.685	1.77	2.202	Yes	0.03

## Installation

Mount the PEX Clips to the underside of the subfloor in the joist cavity with the use of a drywall screw or nail. Secure the tubing to the clips at 36" intervals along the joist cavity. Refer to the Uponor Radiant Installation Handbook for additional information.

## Related applications

Radiant Heating and Cooling Systems

## Footnotes

-

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517