

# ProPEX brass female threaded adapters

## Project Information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

## Technical data

Material	Brass
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

## Product information and application use

ProPEX® brass female threaded adapters connect Uponor PEX pipe to female NPT threads. 1 Use the adapters in hydronic heating and cooling systems. One end of the adapter is manufactured with the Uponor ProPEX fitting for connection to Wirsbo hePEX™ pipe; the other end is manufactured to adapt a male thread. These adapters are not safe for direct burial in soil. Note: Not for potable use.

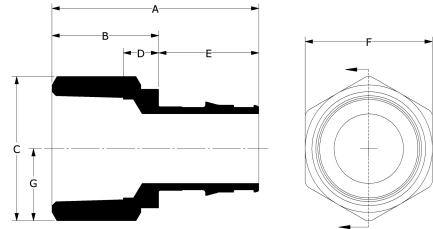

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Cv	Equivalent length through [ft]	End Type 1
ProPEX Brass Female Threaded Adapter, 1/2" PEX x 1/2" NPT	Q5575050	1.569	0.86	1.139	0.326	0.709	1.0	0.57	4.8	2.5	ProPEX 1/2"
ProPEX Brass Female Threaded Adapter, 5/8" PEX x 3/4" NPT	Q4576375	1.906	1.04	1.345	0.486	0.866	1.187	-	-	-	ProPEX 5/8"
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 3/4" NPT	Q5577575	1.845	0.9	1.356	0.347	0.945	1.187	0.678	12	2.3	ProPEX 3/4"
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 1" NPT	Q5577510	2.145	1.2	1.717	0.52	0.945	1.5	0.858	10.8	3.6	ProPEX 3/4"
ProPEX Brass Female Threaded Adapter, 1" PEX x 1" NPT	Q5571010	2.381	1.2	1.717	0.52	1.181	1.5	0.858	19.7	3.8	ProPEX 1"
ProPEX Brass Female Threaded Adapter, 1 1/4" PEX x 1 1/4" NPT	Q5571313	2.57	1.125	2.294	0.415	1.445	2.0	1.147	30.8	4.8	ProPEX 1-1/4"
ProPEX Brass Female Threaded Adapter, 1 1/2" PEX x 1 1/2" NPT	Q5571515	2.854	1.15	2.583	0.42	1.704	2.25	1.291	40.9	5.1	ProPEX 1-1/2"
ProPEX Brass Female Threaded Adapter, 2" PEX x 2" NPT	Q5572020	3.547	1.4	3.449	0.703	2.147	3.0	1.724	77.7	5.7	ProPEX 2"

Part name	Part no.	End Type 2	Weight per UOM [lbs/UOM]
ProPEX Brass Female Threaded Adapter, 1/2" PEX x 1/2" NPT	Q5575050	FNPT 1/2"	0.14
ProPEX Brass Female Threaded Adapter, 5/8" PEX x 3/4" NPT	Q4576375	FNPT 3/4"	0.2
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 3/4" NPT	Q5577575	FNPT 3/4"	0.2
ProPEX Brass Female Threaded Adapter, 3/4" PEX x 1" NPT	Q5577510	FNPT 1"	0.4
ProPEX Brass Female Threaded Adapter, 1" PEX x 1" NPT	Q5571010	FNPT 1"	0.4
ProPEX Brass Female Threaded Adapter, 1 1/4" PEX x 1 1/4" NPT	Q5571313	FNPT 1-1/4"	0.67
ProPEX Brass Female Threaded Adapter, 1 1/2" PEX x 1 1/2" NPT	Q5571515	FNPT 1-1/2"	1.2
ProPEX Brass Female Threaded Adapter, 2" PEX x 2" NPT	Q5572020	FNPT 2"	2.2

Part name	Part no.	Codes	Standards	Listings
ProPEX brass female threaded adapters	All	IMC IBC IRC NPC of Canada UMC	ASTM F1960 CSA B137.5 NSF-14 ASTM F877	IAPMO-ES ICC-ES-PMG cNSF-us-rfh

**Installation**

Use the appropriate ProPEX ring for Uponor PEX pipe (sold separately). Refer to the Uponor Radiant Installation Handbook, Complete Design Assistance Manual (CDAM), or Hydronic Piping Design Assistance Manual (HPDAM) for additional information.

**Related applications**

Radiant Heating and Cooling Systems  
Permafrost Protection Systems  
Turf Conditioning Systems  
Hydronic Piping Systems

**Footnotes**

-

**Contact information**

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517