
ProPEX lead-free (LF) brass elbows (PEX and MIP)

Project information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	LF Brass
End type 1	ProPEX 1/2"
End type 2	MNPT 1/2"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

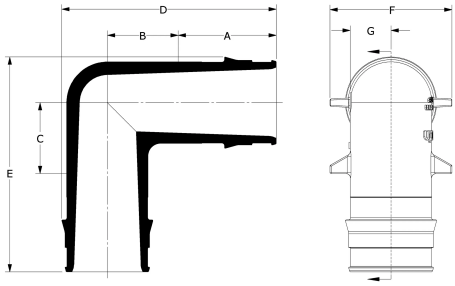

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	Weight per UOM [lbs/UOM]
ProPEX LF Brass Elbow, 1/2" PEX x 1/2" MIP	LF4125050	0.709	0.521	0.581	1.655	1.491	0.85	0.425	0.12

Part name	Part no.	Codes	Standards	Listings
ProPEX lead-free (LF) brass elbows (PEX and MIP)	LF4125050	UPC|IBC|IRC|IPC|NPC of Canada|UMC|NSPC|IMC	ASTM F877|NSF/ANSI/CAN 372|ASTM F1960|CSA B137.5|NSF/ANSI/CAN 61|NSF/ANSI 14	ICC-ES-PMG|cNSFus-pw-G|IAPMO 3558|U.P.Code

Installation

-

Related applications

-

Footnotes

-

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved