
# ProPEX lead-free (LF) brass angle stop valves

## Project information

| | |
|---|---|
| Job name: | Location: |
| Engineer: | Date submitted: |
| Contractor: | Submitted by: |
| Manufacturer's representative: | Approved by: |

## Technical data

| | |
|---|---|
| Material | LF Brass |
| End type 1 | ProPEX 1/2" |
| End type 2 | UNEF 3/8" |
| Temp/pressure ratings | 194 °F (90 °C) at 145 psi (10 bar) |
| Prop 65 label required? | Yes |

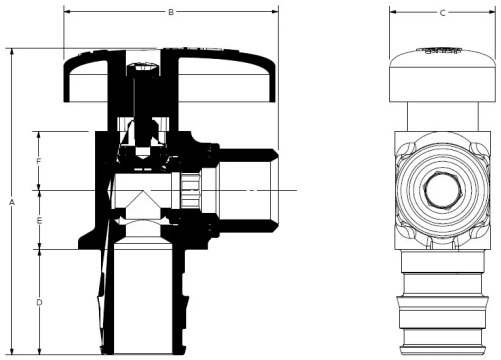


## Product information and application use

For point-of-use shutoff at the fixture, ProPEX® straight and angle stop valves are lead-free (LF) brass, chrome-plated, quarter-turn ball valves that feature an ASTM F1960 connection for 1/2" Uponor AquaPEX® pipe and a 3/8" male threaded connection for fixture risers.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

| | Part name | Part no. | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | Weight per UOM [lbs/UOM] |
|---|---|---|---|---|---|---|---|---|---|
| ✔ | ProPEX LF Brass Angle Stop Valve, 1/2" PEX x 3/8" OD Comp. | LF5855038 | 2.057 | 1.446 | 0.7 | 0.709 | 0.394 | 0.396 | 0.15 |

| Part name | Part no. | Codes | Standards | Listings |
|---|---|---|---|---|
| ProPEX lead-free (LF) brass angle stop valves | LF5855038 | UPC\|IBC\|IRC\|IPC\|NPC of Canada\|UMC\|NSPC\|IMC | ASME A112.18.1\|NSF/ANSI/CAN 372\|ASTM F877\|ASTM F1960\|CSA B125\|CSA B137.5\|NSF/ANSI/CAN 61\|NSF/ANSI 14 | cNSFus-pw-G\|U.P.Code |

## Installation

Install valves according to local building code. Do not dismantle. Refer to the Uponor PEX Piping Systems Design and Installation Manual or Uponor PEX Piping Systems Installation Guide for additional information. For rigid fixture riser connections, use the Uponor ⅜" OD Compression Nut and Nylon Sleeve (part number F5440380), sold separately.

## Related applications

PEX-a Plumbing Systems

## Footnotes

-

## Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor North America. All Rights Reserved