

TruFLOW Jr. valveless manifolds

Submittal information


Date submitted:

Project Information

Job name :	Location :
Engineer :	Date submitted:
Contractor :	Submitted by:
Manufacturer's representative :	Approved by :

Technical Data

Material	Brass
Manifold size	1
Loop Cv	1.9 Cv
End type 1	ISO 228-G 1-1/4"
End type 2	ISO 228-G 3/4"
Temp./pressure ratings	73°F (23°C) at 160 psi (11 bar) 180°F (82°C) at 100 psi (6.9 bar) 200°F (93°C) at 80 psi (5.5 bar)
Max. fluid flow rate	14 gpm

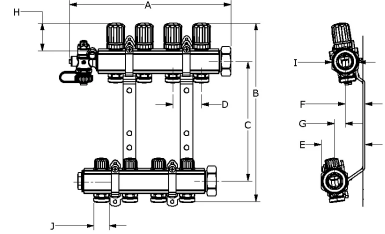

Product information and application use

Use the TruFLOW™ Jr. Valveless Manifold with either the TruFLOW Jr. Manifold with Isolation Valves or the TruFLOW Jr. Manifold with Balancing Valves to complete the manifold set. The TruFLOW Jr. Valveless Manifold does not feature flow balancing or isolation capability. Manifolds are available in 2-, 3- and 4-loop configurations. The manifold body ends have R32 unions and the loop outlets have R20 male threads.

Part name	Part no.	C [inch]	Weight per UOM [lbs/UOM]
TruFLOW Jr. Valveless, 2-loop	A2663202	-	2.1
TruFLOW Jr. Valveless, 3-loop	A2663203	-	2.8
TruFLOW Jr. Valveless, 4-loop	A2663204	2.3	3.4

Installation

Refer to the TruFLOW Jr. Manifold Instruction Sheet or the Uponor Complete Design Assistance Manual for additional information.

Related applications

- Radiant Heating and Cooling Systems
- Permafrost Prevention Systems
- Turf Conditioning Systems

Codes

IMC|IRC|NBC of Canada|UMC

Standards

CSA B137.5|R32: ISO 228-G 1 1/4"|ASTM F877|R20: ISO 228-G 3/4"

Listings

cNSFus-rfh

Notes

- Manifold body threaded connections: R32
- Manifold loop threaded connections: R20

Trademark Information

ProPEX® is a registered trademark of Uponor Inc. ProPEX™ is a trademark of Uponor Ltd.

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.636.9517