

# QS-style coupling nipples

## Project Information


Job name :	Location :
Engineer :	Date submitted:
Contractor :	Submitted by:
Manufacturer's representative :	Approved by :

## Technical data

Material	Brass
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

## Product information and application use

The Uponor QS-style Coupling Nipple is available in R20 and R25 thread. It is used with compression fittings to connect 5/16", 3/8", 1/2", 5/8" or 3/4" Wirsbo hePEX™ pipe in radiant heating and cooling applications. Note that R25 is for 5/8" and 3/4" pipe only.

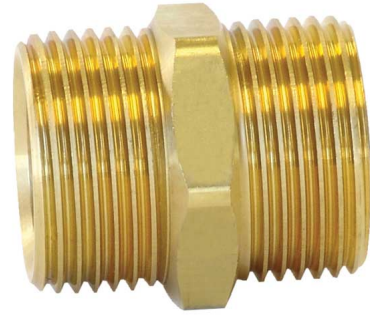

Part name	Part no.	A [inch]	B [inch]	C [inch]	Weight per UOM [lbs/UOM]	End Type 1	End Type 2
QS-style Coupling Nipple, R20 x R20	A4322020	1.299	1.227	1.063	0.17	ISO 228-G 3/4"	ISO 228-G 3/4"
QS-style Coupling Nipple, R25 x R25 (for 3/4" and 5/8" tubing only)	A4322525	1.635	1.588	1.375	0.3	ISO 228-G 1"	ISO 228-G 1"

## Installation

Corresponding QS-style fitting assembly threads onto QS-style Coupling Nipple fitting for repairs. For more information, refer to the Uponor Radiant Installation Handbook.

## Related applications

Radiant Heating and Cooling Systems

## Codes

-

## Standards

ASTM F877|R20: ISO 228-G 3/4"

## Listings

-

## Trademark information

ProPEX® is a registered trademark of Uponor Inc. ProPEX™ is a trademark of Uponor Ltd.  
\* Some SKUs in this family have additional codes, standards, or listings. Please see uponor.com for complete information.

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.636.9517