

Tube talons

Project information


Job name :	Location :
Engineer :	Date submitted:
Contractor :	Submitted by:
Manufacturer's representative :	Approved by :

Technical data

Material Plastic

Product information and application use

Tube Talon secures 3/8", 1/2", 5/8", 3/4" and 1" Uponor crosslinked polyethylene (PEX) tubing products. Fasteners are included.

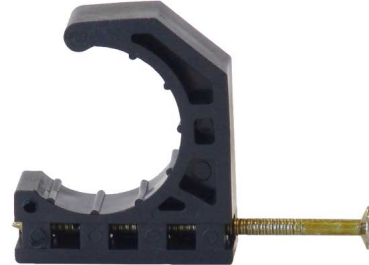

Part name	Part no.	A [Inch]	B [Inch]	C [Inch]	Weight per UOM [lbs/UOM]
Tube Talon (3/8" PEX), 100/pkg.	F7050375	1.575	0.957	0.354	0.01
Tube Talon (1/2", 5/8", 3/4" PEX), 100/pkg.	F7050750	2.217	1.551	0.4	0.01
Tube Talon (1" PEX), 50/pkg.	F7051000	2.806	1.622	0.535	0.02

Installation

Mount the tube talon over the tubing and mounting surface. Attach the tube talon to desired surface with the nail provided. Refer to the Uponor Radiant Floor Installation Handbook or the Uponor Professional Plumbing Installation Guide for additional information.

Related applications

- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems
- PEX-a Plumbing Systems

Codes

Standards

Listings

-

Footnotes

Contact information

-	<p>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</p>	<p>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.636.9517</p>
---	--	--