


ProPEX (type L) copper lead-free (LF) valved manifolds

| Project information            |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Date submitted: |
| Contractor:                    | Submitted by:   |
| Manufacturer's representative: | Approved by:    |

| Technical data          |                                                                                                                                                        |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                | Copper                                                                                                                                                 |
| Manifold size           | 1 inch                                                                                                                                                 |
| End type 1              | ProPEX 1/2"                                                                                                                                            |
| Temp/pressure ratings   | 73 °F (23 °C) at 160 psi (11 bar)<br>180 °F (82 °C) at 100 psi (6.9 bar)<br>200 °F (93 °C) at 80 psi (5.5 bar)<br>210 °F (99 °C) at 149 psi (10.3 bar) |
| Max. fluid flow rate    | 21 gpm                                                                                                                                                 |
| Prop 65 label required? | Yes                                                                                                                                                    |

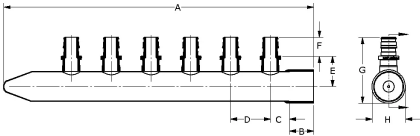

Product information and application use

Uponor's 1" Copper Manifold with Lead-free Brass 1/2" ProPEX® Ball Valve provides simple and easy isolation of individual loops. 1 Sections can sweat together to extend the number of outlets using a standard 1" copper coupling. Both 1" ends are copper pipe size and require a copper end cap, coupling or transition fitting to make the proper system connection. Do not exceed accepted flow rates for 1" nominal copper.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

| Part name                                                           | Part no.  | A [mm] | B [mm] | C [mm] | D [mm] | E [mm] | F [mm] | G [mm] | H [mm] | Weight per UOM [kg/UOM] |
|---------------------------------------------------------------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|-------------------------|
| 1" Copper Manifold with LF Brass 1/2" ProPEX Ball Valve, 4 outlets  | LF2500400 | 190.50 | 0      | 38.10  | 38.10  | 68.54  | 18     | 100.83 | 41.99  | 0.748                   |
| 1" Copper Manifold with LF Brass 1/2" ProPEX Ball Valve, 6 outlets  | LF2500600 | 266.70 | 0      | 38.10  | 38.10  | 68.54  | 18     | 100.83 | 41.99  | 1.179                   |
| 1" Copper Manifold with LF Brass 1/2" ProPEX Ball Valve, 8 outlets  | LF2500800 | 342.90 | 0      | 38.10  | 38.10  | 68.54  | 18     | 100.83 | 41.99  | 1.542                   |
| 1" Copper Manifold with LF Brass 1/2" ProPEX Ball Valve, 10 outlets | LF2501000 | 419.10 | 0      | 38.10  | 38.10  | 68.54  | 18     | 100.83 | 41.99  | 1.905                   |
| 1" Copper Manifold with LF Brass 1/2" ProPEX Ball Valve, 12 outlets | LF2501200 | 495.30 | 0      | 38.10  | 38.10  | 68.54  | 18     | 100.83 | 41.99  | 2.2                     |

| Part name                                              | Part no. | Codes                                      | Standards                                             | Listings                                  |
|--------------------------------------------------------|----------|--------------------------------------------|-------------------------------------------------------|-------------------------------------------|
| ProPEX (type L) copper lead-free (LF) valved manifolds | All      | UPC IBC IRC IPC NPC of Canada UMC NSPC IMC | NSF-372 ASTM F877 ASTM F1960 CSA B137.5 NSF-61 NSF-14 | IAPMO-ES ICC-ES-PMG cNSFus-pw-G U.P. Code |

| Installation                                                                                                                                                                                                                                                                                                                                | Related applications   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| The installer can use any product designed to mount 1" copper pipe as a mounting bracket. Any bend within 6 inches of the ProPEX connection to the manifold requires the use of a Tube Talon (F7050750) or Bend Support (A5110500 and A5150500). Refer to the AquaPEX® Professional Plumbing Installation Guide for additional information. | PEX-a Plumbing Systems |

Notes

Flow at 4 fps: 10.2 gpm  
Flow at 5 fps: 12.8 gpm  
Flow at 8 fps: 20.5 gpm

| Footnotes | Contact information                                                                                                                                                                                        |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -         | Uponor Inc.<br>5925 148th Street West<br>Apple Valley, MN 55124<br>T 800.321.4739<br>F 952.891.2008<br><br>Uponor Ltd.<br>6510 Kennedy Road<br>Mississauga, ON L5T 2X4<br>T 888.594.7726<br>F 800.638.9517 |