


ProPEX lead-free (LF) brass elbows (PEX and MIP)

Project information

|                                |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Date submitted: |
| Contractor:                    | Submitted by:   |
| Manufacturer's representative: | Approved by:    |

Technical data

|                         |                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------|
| Material                | LF Brass                                                                                                       |
| End type 1              | ProPEX 1/2"                                                                                                    |
| End type 2              | MNPT 1/2"                                                                                                      |
| Temp/pressure ratings   | 73 °F (23 °C) at 160 psi (11 bar)<br>180 °F (82 °C) at 100 psi (6.9 bar)<br>200 °F (93 °C) at 80 psi (5.5 bar) |
| Prop 65 label required? | Yes                                                                                                            |

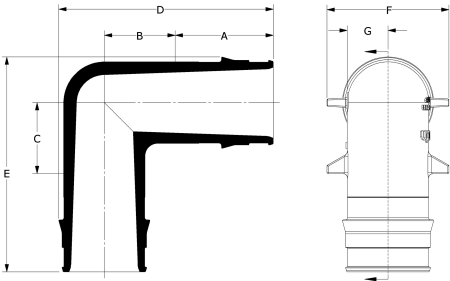

| Part name                                  | Part no.  | A [mm] | B [mm] | C [mm] | D [mm] | E [mm] | F [mm] | G [mm] | Weight per UOM [kg/UOM] |
|--------------------------------------------|-----------|--------|--------|--------|--------|--------|--------|--------|-------------------------|
| ProPEX LF Brass Elbow, 1/2" PEX x 1/2" MIP | LF4125050 | 18     | 13.23  | 14.76  | 42.03  | 37.86  | 21.59  | 10.80  | 0.054                   |

| Part name                                        | Part no.  | Codes                                      | Standards                                                                    | Listings                                   |
|--------------------------------------------------|-----------|--------------------------------------------|------------------------------------------------------------------------------|--------------------------------------------|
| ProPEX lead-free (LF) brass elbows (PEX and MIP) | LF4125050 | UPC IBC IRC IPC NPC of Canada UMC NSPC IMC | ASTM F877 NSF/ANSI/CAN 372 ASTM F1960 CSA B137.5 NSF/ANSI/CAN 61 NSF/ANSI 14 | ICC-ES-PMG cNSFus-pw-G IAPMO 3558 U.P.Code |

Installation Related applications

-

Footnotes

-

Contact information

|                                                                                                     |                                                                                                 |
|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Uponor Inc.<br>5925 148th Street West<br>Apple Valley, MN 55124<br>T 800.321.4739<br>F 952.891.2008 | Uponor Ltd.<br>6510 Kennedy Road<br>Mississauga, ON L5T 2X4<br>T 888.594.7726<br>F 800.638.9517 |
|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|