

Lead-free (LF) brass compression straight stop valves


Project information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Product information and application use

For point-of-use shutoff at the fixture, compression straight and angle stop valves are lead-free (LF) brass, chrome-plated, quarter-turn ball valves that include a stainless-steel insert for compression connection to 1/2" Uponor AquaPEX® pipe and a 3/8" male threaded connection for fixture risers.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

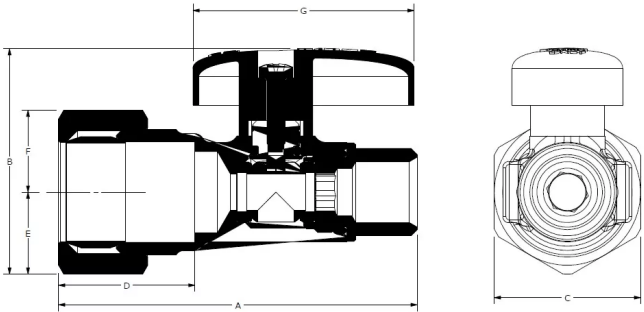

Part name	Part no.	A [mm]	B [mm]	C [mm]	Material group	D [mm]	E [mm]	F [mm]	G [mm]	End Type 1	End Type 2
1/2" Insert (stainless steel)	F5400500	25.40	15.49	15.49	Stainless Steel	-	-	-	-	-	-
LF Brass Compression Straight Stop Valve with PEX Stiffener, 1/2" Comp. x 3/8" OD Comp.	LF5425038	58.56	36.56	23.81	LF Brass	22.36	13.21	13.21	36.07	Compression	UNEF

Part name	Part no.	Prop 65 label required?	Weight per UOM [kg/UOM]
1/2" Insert (stainless steel)	F5400500	-	0.00227
LF Brass Compression Straight Stop Valve with PEX Stiffener, 1/2" Comp. x 3/8" OD Comp.	LF5425038	Yes	0.095

Part name	Part no.	Codes	Standards	Listings
Lead-free (LF) brass compression straight stop valves	All	UPC IBC IRC IPC NPC of Canada UMC NSPC IMC	ASME A112.18.1 NSF/ANSI/CAN 372 ASTM F877 ASTM F1960 CSA B125 CSA B137.5 NSF/ANSI/CAN 61 NSF/ANSI 14	cNSFus-pw-G U.P.Code

Installation	Related applications
Install valves according to local building code. Use only the stainless steel inserts supplied by Uponor with these compression stop valves. Substitution can result in valve connection failure. Do not dismantle. Refer to the Uponor PEX Piping Systems Design and Installation Manual or Uponor PEX Piping Systems Installation Guide for additional information. For rigid fixture riser connections, use the Uponor 3/8" OD Compression Nut and Nylon Sleeve (part number F5440380), sold separately.	PEX-a Plumbing Systems

Footnotes	Contact information
-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008 Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517