
Product data sheet



GF Uponor Aqua Pipe natural PN10 25x3,5 50m

1001202

- Material: PE-Xa
- Operating pressure 10 bar
- In coils

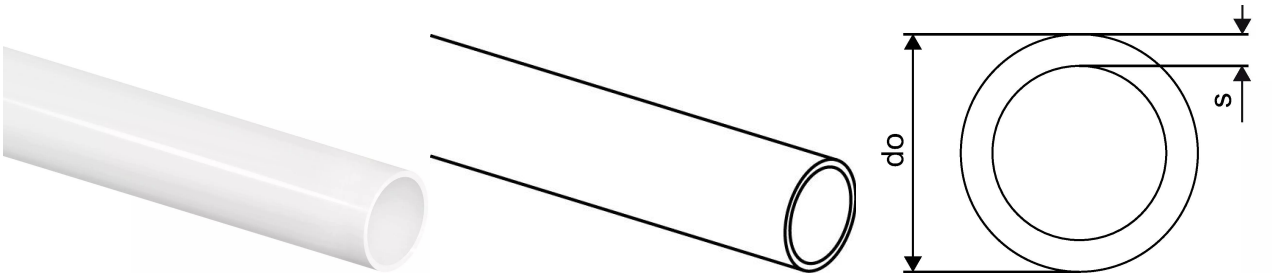

Application information GF Uponor Aqua Pipe natural PN10

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) in accordance with EN ISO 15875
- Application class 2 – hot water supply
- Fire classification E according to DIN EN 13501-1
- Operating pressure up to 6 bar (PN6), depending on variant
- Available as plain pipe or pipe in protective conduit

Application

- Tap water installations for hot and cold water distribution
- Permanent operating temperature from 0 °C to 70 °C
- Short-term malfunction temperature up to 95 °C for a total of 100 hours over the service life

GF Uponor Aqua Pipe natural PN10 25x3,5 50m

1001202

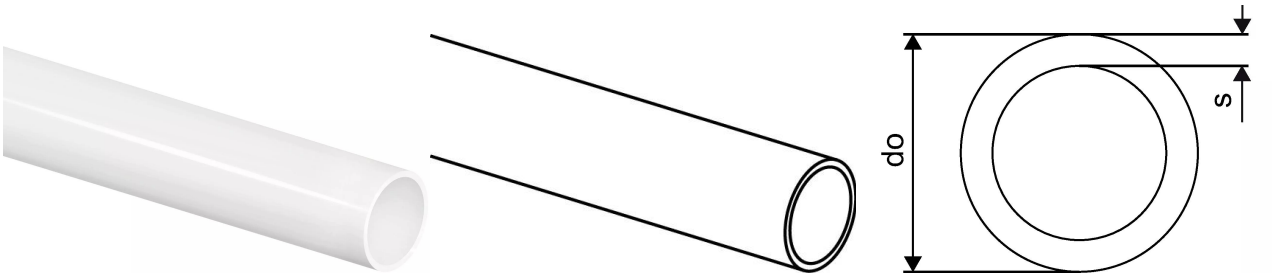

Product code

Item no EAN	7321500031701
Item no GF	35001001202
Item no GTIN	07321500031701
Item no VVS	087210025

Dimensions

Item Unit Height	25
Item Unit Length	1000
Item Unit Weight	0,236
Item Unit Width	25
Item_UOM	m

Measurements

Outer Diameter_do	25
Wall thickness_s	3,5

Packaging

Packaging GTIN PL1	06414905250677
Packaging GTIN PL4	06414905250691
Packaging Height PL1	804
Packaging Height PL4	950
Packaging Length PL1	788
Packaging Length PL4	1200
Packaging Material (number) PL1	20
Packaging Material PL1	corrugated cardboard / cartone
Packaging Material (short) PL1	PAP_C
Packaging Quantity PL1	50
Packaging Quantity PL4	400

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,088697
Packaging Volume PL4	0,912
Packaging Weight PL1	12,78
Packaging Weight PL4	127,24
Packaging Width PL1	140
Packaging Width PL4	800

Technical data

Recycling Text Block PL1	corrugated cardboard / cartone

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+