


Uponor Aqua Pipe natural PN10 32x4,4 50m

1001203

- Operating pressure 10 bar
- Coil

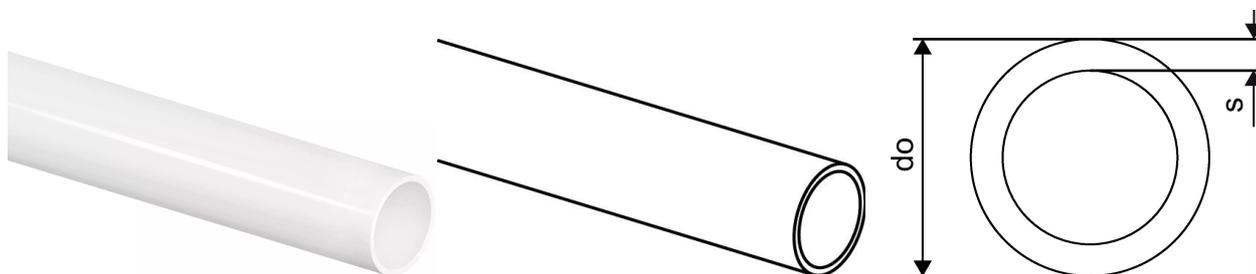

Application information Uponor Aqua Pipe natural PN10

Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural PN10 32x4,4 50m

1001203



Product code

Item no EAN	7321500018252
Item no GF	35001001203
Item no GTIN	07321500018252
Item no LVI	2012532
Item no NOBB	41942857
Item no NRF	5110022
Item no RSK	2418000
Item no VVS	087210650

Dimensions

Item Unit Height	32
Item Unit Length	1000
Item Unit Weight	0,386
Item Unit Width	32
Item_UOM	m

Measurements

Outer Diameter_do	32
Wall thickness_s	4,4

Packaging

Packaging GTIN PL1	06414905250707
Packaging GTIN PL4	06414905250714
Packaging Height PL1	940
Packaging Height PL4	1800
Packaging Length PL1	940
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	350
Packaging Type PL1	Coil

Packaging Type PL4	Pallet
Packaging Volume PL1	0,2209
Packaging Volume PL4	1,728
Packaging Weight PL1	19,3
Packaging Weight PL4	161,1
Packaging Width PL1	250
Packaging Width PL4	800

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com