


## Uponor Aqua Pipe natural PN10 S 32x4,4 6m

1001206

- Material: PE-Xa
- Operating pressure 10 bar
- In bars

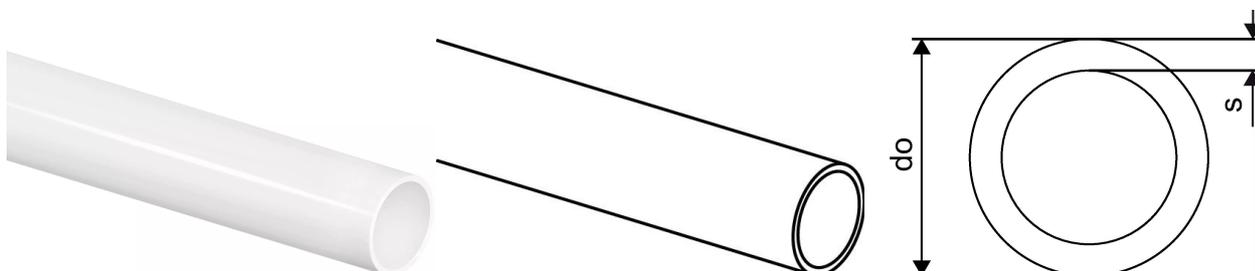

### Application information Uponor Aqua Pipe natural PN10 S

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

## Uponor Aqua Pipe natural PN10 S 32x4,4 6m

1001206

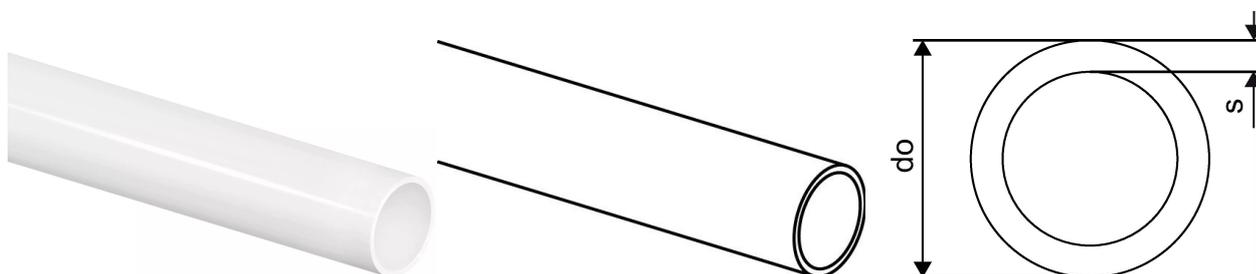

### Product code

Item no EAN	7321500017996
Item no GF	35001001206
Item no GTIN	07321500017996
Item no LVI	2012590
Item no NOBB	47600420
Item no NRF	5110045
Item no RSK	2418096
Item no VVS	087310132

### Dimensions

Item Unit Height	33
Item Unit Length	1000
Item Unit Weight	0,386
Item Unit Width	33
Item_UOM	m

### Measurements

Outer Diameter_do	32
Wall thickness_s	4,4

### Packaging

Packaging GTIN PL1	06414905250721
Packaging GTIN PL4	06414905250745
Packaging Height PL1	33
Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL4	6100
Packaging Quantity PL1	12
Packaging Quantity PL4	1080
Packaging Type PL1	Plastic_Bag

Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,013068
Packaging Volume PL4	2,7755
Packaging Weight PL1	4,44
Packaging Weight PL4	424,6
Packaging Width PL1	66
Packaging Width PL4	650

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)