


Uponor Radi Pipe natural PN6 S 32x2,9 6m

1001222

- Operating pressure 6 bar
- 6 m bars

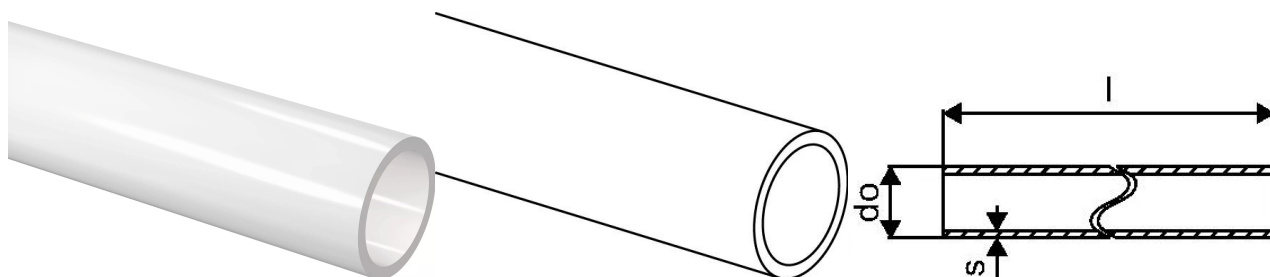

Application information Uponor Radi Pipe natural PN6 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 S 32x2,9 6m

1001222

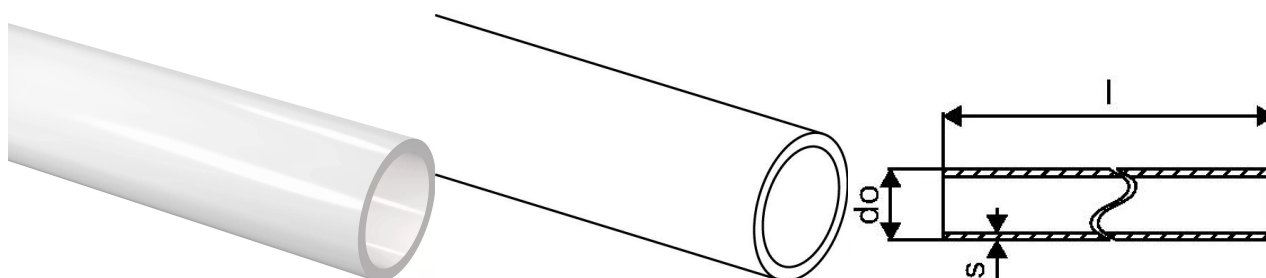

Product code

Item no EAN	7321500044893
Item no GF	35001001222
Item no GTIN	07321500044893
Item no RSK	2418245
Item no VVS	087229132

Dimensions

Item Unit Height	32
Item Unit Length	1000
Item Unit Weight	0,276
Item Unit Width	32
Item_UOM	m

Measurements

Outer Diameter_do	32
Wall thickness_s	2,9

Packaging

Packaging GTIN PL1	06414905421985
Packaging GTIN PL2	06414905421992
Packaging GTIN PL4	06414905662845
Packaging Height PL1	32
Packaging Height PL2	30
Packaging Height PL4	700
Packaging Length PL1	6000
Packaging Length PL2	6000
Packaging Length PL4	6100
Packaging Quantity PL1	6
Packaging Quantity PL2	12
Packaging Quantity PL4	1080

Packaging Type PL1	Piece
Packaging Type PL2	Bag
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,006144
Packaging Volume PL2	0,0099
Packaging Volume PL4	2,7755
Packaging Weight PL1	1,998
Packaging Weight PL2	3,9
Packaging Weight PL4	250
Packaging Width PL1	32
Packaging Width PL2	55
Packaging Width PL4	650

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com