


## Uponor Minitec adapter 9,9x1,1-G3/4" Euro

1005266

- Eurocone
- Brass

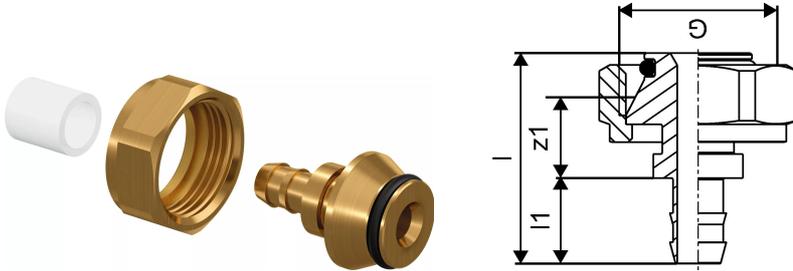

### Application information Uponor Minitec adapter

#### Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- for use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- EN 13501-1 fire classification: class E.
- standard flammability, building-material class B2, conforming to DIN 4102.
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m<sup>2</sup>

#### Application


- radiant underfloor heating and cooling
- very low construction height
- for use with qualified filler materials

#### Certification

- DIN CERTCO: 7F170-F

## Uponor Minitec adapter 9,9x1,1-G3/4" Euro

1005266

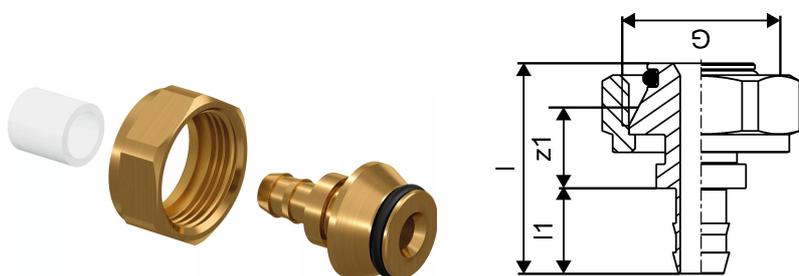

### Measurements

Cylindric_thread_G	0,75
LENGTH_L	35,4
Length (l1)	14,4
z1	13,5

### Product code

Item no EAN	4021598025011
Item no GF	35001005266
Item no GTIN	04021598025011
Item no RSK	2973231

### Dimensions

Item Unit Height	33
Item Unit Length	42
Item Unit Weight	0,067
Item Unit Width	33
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905251971
Packaging GTIN PL3	06414905251988
Packaging GTIN PL4	06414905251995
Packaging Height PL1	100
Packaging Height PL3	95
Packaging Height PL4	570
Packaging Length PL1	140
Packaging Length PL3	277
Packaging Length PL4	1120
Packaging Quantity PL1	10
Packaging Quantity PL3	100

Packaging Quantity PL4	9600
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0007
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,4775232
Packaging Weight PL1	0,682
Packaging Weight PL3	6,8
Packaging Weight PL4	663,677
Packaging Width PL1	50
Packaging Width PL3	179
Packaging Width PL4	748

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)