Product data sheet



GF Uponor Minitec edging strip, self-adh. 20m 80x8mm

1005267

- Edging strip for Minitec system, conforming to DIN 18560, made of polyethylene with self-adhesive backing, self-adhesive strip on outer face provides tight seal between edging strip and insulation.







Application information GF Uponor Minitec edging strip, self-adh.

Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- for use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- EN 13501-1 fire classification: class E.
- standard flammability, building-material class B2, conforming to DIN 4102.
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m²

Application

- radiant underfloor heating and cooling
- very low construction height
- for use with qualified filler materials

Certification

- DIN CERTCO: 7F170-F

GF Uponor Minitec edging strip, self-adh. 20m 80x8mm

1005267

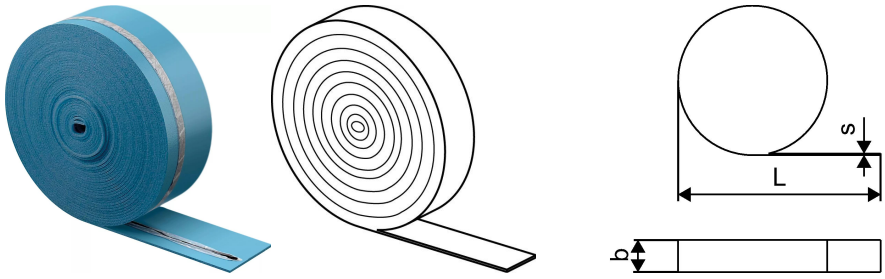

Product code

Item no EAN	4021598024403
Item no GF	35001005267
Item no GTIN	04021598024403
Item no LVI	2023054
Item no NOBB	50389776
Item no NRF	8361057
Item no RSK	2434390
Item no VVS	339262320

Dimensions

Item Unit Height	5
Item Unit Length	1000
Item Unit Weight	0,025
Item Unit Width	80
Item_UOM	m

Measurements

LENGTH_L	20000
Wall thickness_s	8
Z Measurement b	80

Packaging

Packaging GTIN PL2	06414905442201
Packaging Height PL2	870
Packaging Length PL2	470
Packaging Quantity PL2	200
Packaging Type PL2	Bag
Packaging Volume PL2	0,192183

Packaging Weight PL2	5,4
Packaging Width PL2	470

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+