


## Uponor Minitec joint protection tube 9,9mm 300x2mm

1005269

- Made of PE-LD, with slit opening, for protection of UFH pipes up to 9.9 mm in areas of expansion joints.

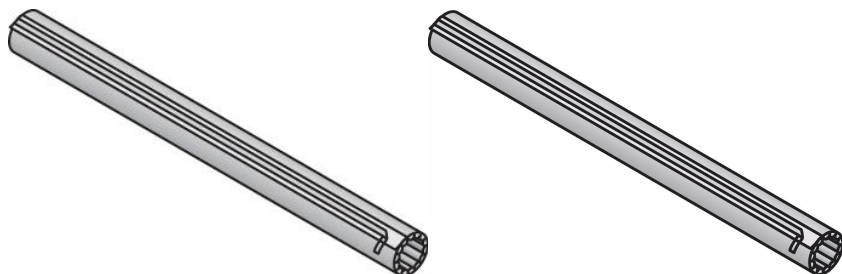

### Application information Uponor Minitec joint protection tube

#### Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- for use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- EN 13501-1 fire classification: class E.
- standard flammability, building-material class B2, conforming to DIN 4102.
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m<sup>2</sup>

#### Application


- radiant underfloor heating and cooling
- very low construction height
- for use with qualified filler materials

#### Certification

- DIN CERTCO: 7F170-F

Uponor Minitec joint protection tube 9,9mm 300x2mm

1005269

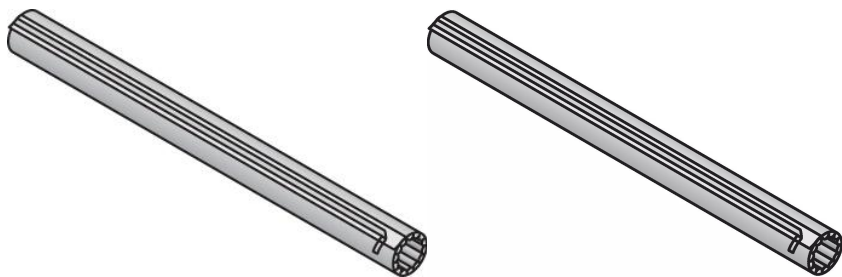

Technical data

Item (unit of measurement)	pce
Packaging Quantity PL1	30
Packaging Quantity PL3	3600
Packaging Quantity PL4	21600

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com