


## Uponor Siccus 14 panel EPS 150kPa 14mm 1197x1050x25mm

**1005485**

- installation panel with grooves
- EPS compressive strength: = 150 kPa
- R=0.622 m<sup>2</sup>K/W

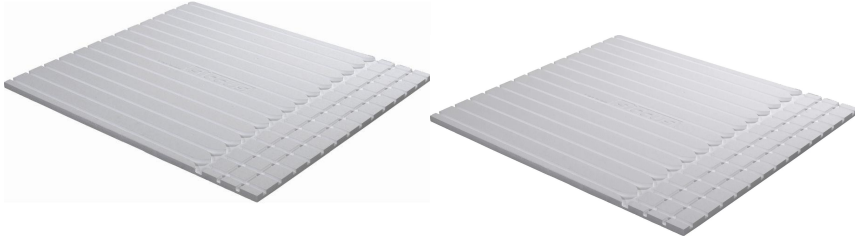

### Application information Uponor Siccus 14 panel

#### Specification

- Siccus underfloor heating panel system, consists of EPS (HBCD-free) boards acc. EN 13163 with Aluminium heat spreaders.
- EN 13501-1 fire classification: class E.
- flame retardant class B1 acc. DIN 4102
- Application type acc to DIN 4108-10: DEO dh, WI
- life load acc. EN 1991-1-1 = 7,5kN/m<sup>2</sup>
- for installations with pipe c-c 150mm
- for pipe dim 14mm

#### Application

- radiant underfloor heating and cooling
- for dry-build installations
- for sports floors

#### Certification

- DIN CERTCO: 7F008-F, 7F009-F, 7F332-F

## Uponor Siccus 14 panel EPS 150kPa 14mm 1197x1050x25mm

1005485



### Product code

Item no EAN	4021598026209
Item no GF	35001005485
Item no GTIN	04021598026209

### Dimensions

Item Unit Height	26
Item Unit Length	1000
Item Unit Weight	1
Item Unit Width	1000
Item_UOM	m <sup>2</sup>

### Packaging

Packaging GTIN PL1	06414905432691
Packaging GTIN PL4	06414905456260
Packaging Height PL1	270
Packaging Height PL4	2080
Packaging Length PL1	1210
Packaging Length PL4	1211
Packaging Quantity PL1	12.5
Packaging Quantity PL4	100
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,349569
Packaging Volume PL4	2,69772048
Packaging Weight PL1	13,5
Packaging Weight PL4	133
Packaging Width PL1	1070
Packaging Width PL4	1071

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)