


## Uponor Ecoflex wall seal PWP 175

1007361

- For concrete core hole or fibre cement pipe
- Part to seal the casing pipe
- Applicable for PWP (pressurized water)
- Watertight up to 0,3bar

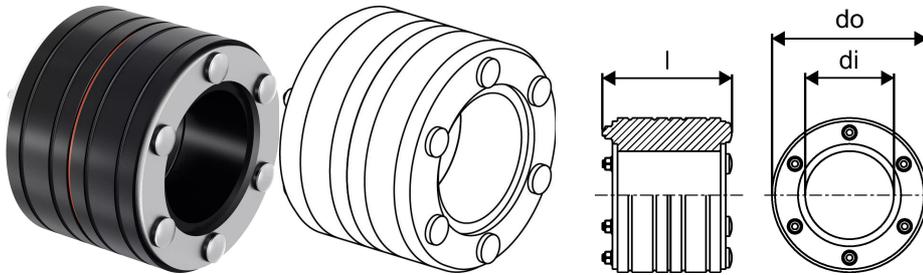

### Application information Uponor Ecoflex wall seal PWP

#### Specification

- All accessories are corrosion resistant.

#### Application


- Ecoflex accessories are designed to complete the assortment in buried installation.

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex wall seal PWP 175

1007361

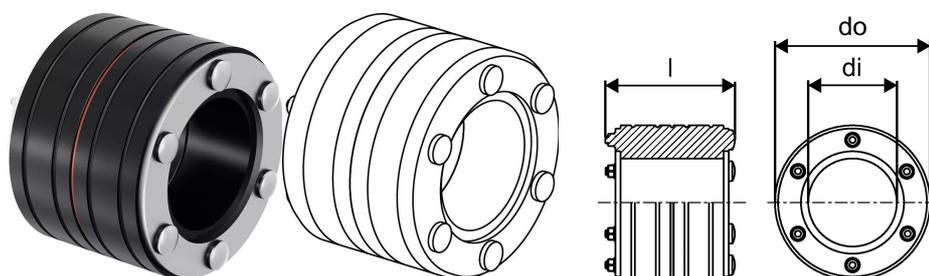

### Measurements

|                   |     |
|-------------------|-----|
| Inner_diameter_di | 175 |
| LENGTH_L          | 110 |
| Outer Diameter_do | 250 |

### Product code

|              |                |
|--------------|----------------|
| Item no EAN  | 4021598101036  |
| Item no GF   | 35001007361    |
| Item no GTIN | 04021598101036 |
| Item no NRF  | 8361408        |
| Item no VVS  | 087916217      |

### Dimensions

|                  |     |
|------------------|-----|
| Item Unit Height | 250 |
| Item Unit Length | 110 |
| Item Unit Weight | 3,3 |
| Item Unit Width  | 250 |
| Item_UOM         | pce |

### Packaging

|                        |                |
|------------------------|----------------|
| Packaging GTIN PL1     | 06414905252442 |
| Packaging Height PL1   | 115            |
| Packaging Length PL1   | 260            |
| Packaging Quantity PL1 | 1              |
| Packaging Type PL1     | Base_Box       |
| Packaging Volume PL1   | 0,007774       |
| Packaging Weight PL1   | 3,744          |
| Packaging Width PL1    | 260            |

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)