


Uponor Ecoflex wall seal PWP 200

1007362

- For concrete core hole or fibre cement pipe
- Part to seal the casing pipe
- Applicable for PWP (pressurized water)
- Watertight up to 0,3bar

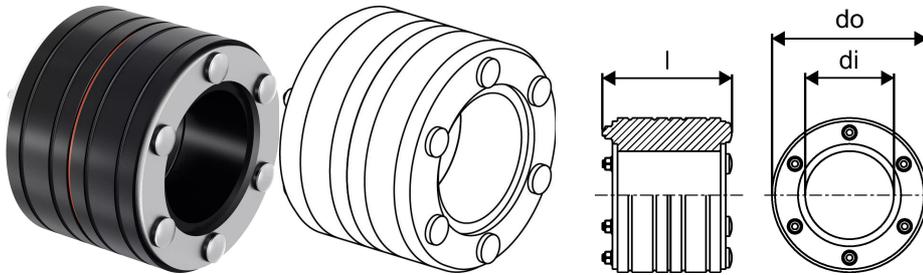

Application information Uponor Ecoflex wall seal PWP

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed to complete the assortment in buried installation.

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex wall seal PWP 200

1007362

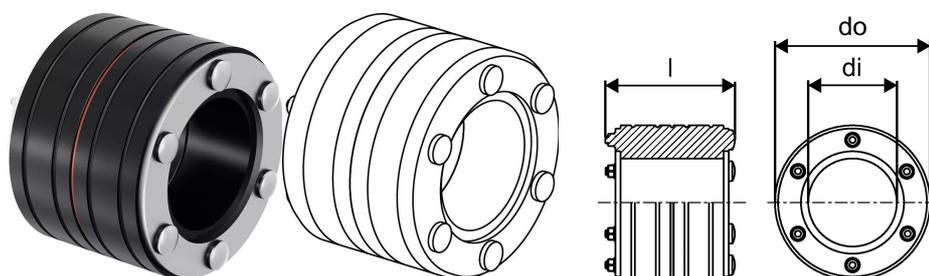

Measurements

Inner_diameter_di	200
LENGTH_L	110
Outer Diameter_do	300

Product code

Item no EAN	4021598101043
Item no GF	35001007362
Item no GTIN	04021598101043
Item no VVS	087916220

Dimensions

Item Unit Height	300
Item Unit Length	110
Item Unit Weight	5,238
Item Unit Width	300
Item_UOM	pce

Technical data

Recycling Text Block PL1	Corrugated fibreboard
--------------------------	-----------------------

Packaging

Packaging GTIN PL1	06414905433643
Packaging Height PL1	115
Packaging Length PL1	305
Packaging Material (number) PL1	20
Packaging Material PL1	Corrugated fibreboard
Packaging Material (short) PL1	PAP
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,010697875
Packaging Weight PL1	5,38

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com