


Uponor Radi Pipe natural PN6 S 75x6,8 6m

1008864

- Operating pressure 6 bar
- 6 m bars

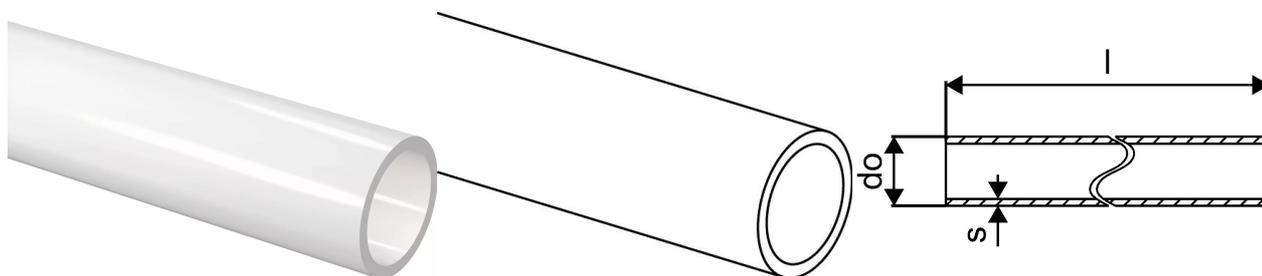

Application information Uponor Radi Pipe natural PN6 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 S 75x6,8 6m

1008864

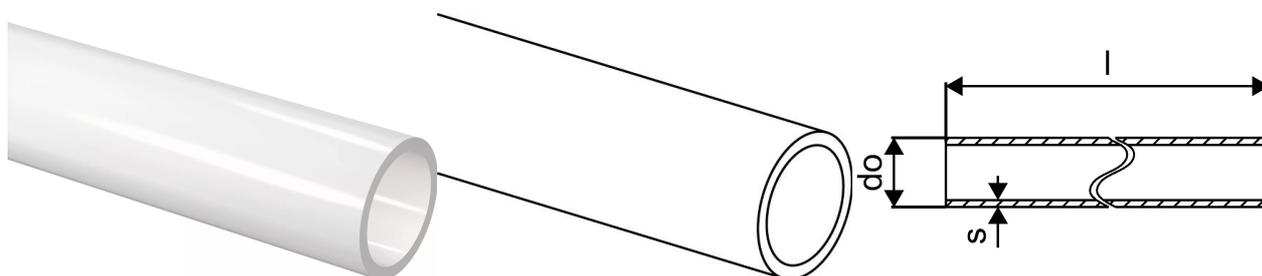

Product code

Item no EAN	7321500033644
Item no GF	35001008864
Item no GTIN	07321500033644
Item no VVS	087230475

Dimensions

Item Unit Height	75
Item Unit Length	1000
Item Unit Weight	1,435
Item Unit Width	75
Item_UOM	m

Measurements

Outer Diameter_do	75
Wall thickness_s	6,8

Packaging

Packaging GTIN PL1	06414905422050
Packaging Height PL1	77
Packaging Length PL1	6000
Packaging Quantity PL1	6
Packaging Type PL1	Piece
Packaging Volume PL1	0,035574
Packaging Weight PL1	8,61
Packaging Width PL1	77

Documents

Page with all documents



www.uponor.com