


Uponor Radi Pipe natural PN6 S 90x8,2 6m

1008874

- Operating pressure 6 bar
- 6 m bars

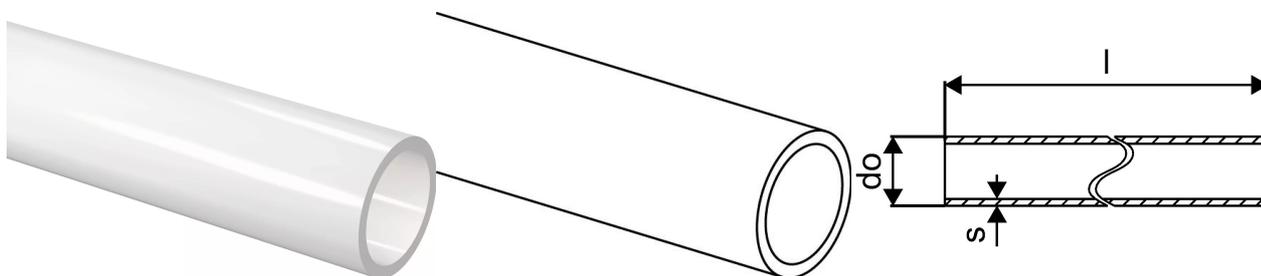

Application information Uponor Radi Pipe natural PN6 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 S 90x8,2 6m

1008874

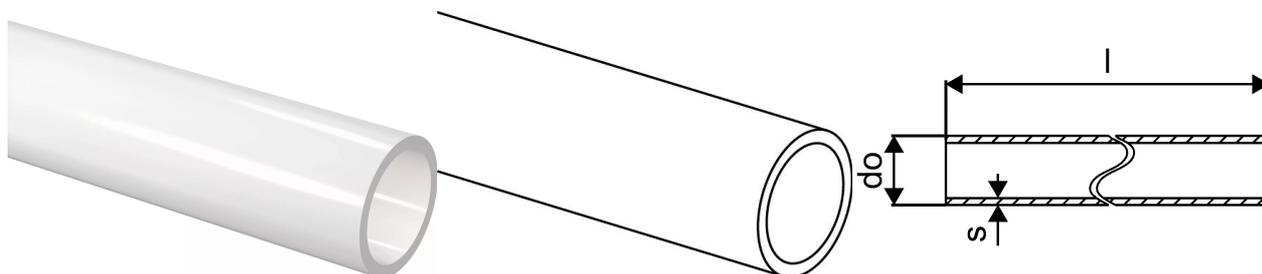

Product code

Item no EAN	7321500034092
Item no GF	35001008874
Item no GTIN	07321500034092

Dimensions

Item Unit Height	90
Item Unit Length	1000
Item Unit Weight	2,113
Item Unit Width	90
Item_UOM	m

Measurements

Outer Diameter_do	90
Wall thickness_s	8,2

Packaging

Packaging GTIN PL1	06414905434381
Packaging Height PL1	90
Packaging Length PL1	6000
Packaging Quantity PL1	6
Packaging Type PL1	Piece
Packaging Volume PL1	0,0486
Packaging Weight PL1	12,678
Packaging Width PL1	90

Documents

Page with all documents

T +358 (0)20 129 211

www.uponor.com