


## Uponor Radi Pipe natural PN6 S 110x10,0 6m

1008879

- Operating pressure 6 bar
- 6 m bars

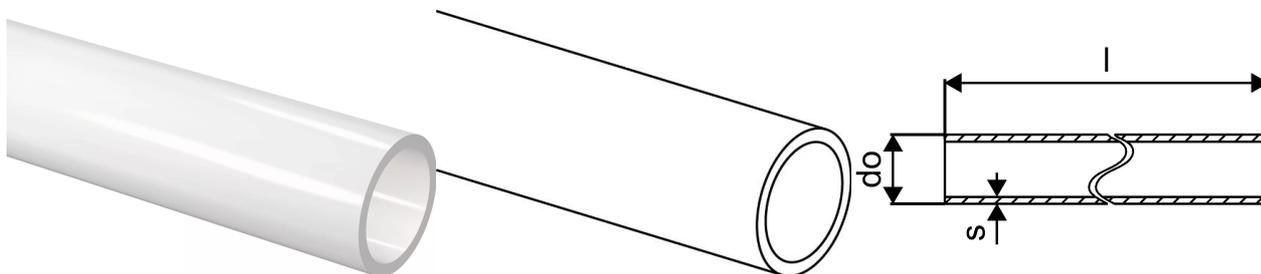

### Application information Uponor Radi Pipe natural PN6 S

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 S 110x10,0 6m

1008879

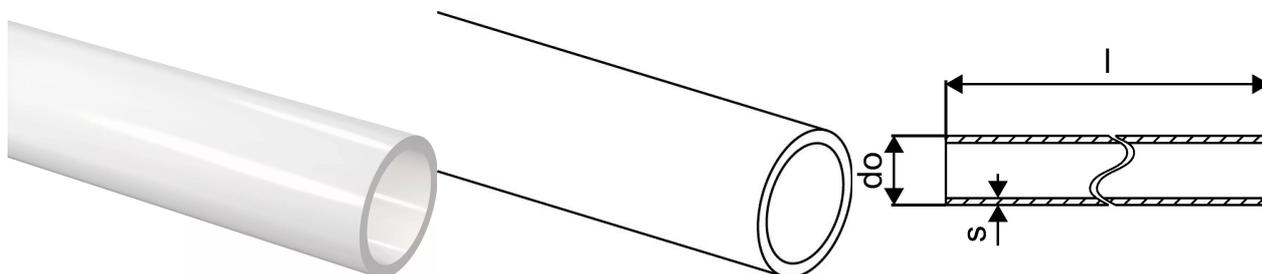

### Product code

Item no EAN	7321500033729
Item no GF	35001008879
Item no GTIN	07321500033729

### Dimensions

Item Unit Height	110
Item Unit Length	1000
Item Unit Weight	3,095
Item Unit Width	110
Item_UOM	m

### Measurements

Outer Diameter_do	110
Wall thickness_s	10,0

### Packaging

Packaging GTIN PL1	06414905421978
Packaging Height PL1	112
Packaging Length PL1	6000
Packaging Quantity PL1	6
Packaging Type PL1	Piece
Packaging Volume PL1	0,075264
Packaging Weight PL1	18,57
Packaging Width PL1	112

### Documents

Page with all documents

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)