
Product data sheet



GF Uponor Aqua Pipe natural PN10 50x6,9 50m

1008964

- Material: PE-Xa
- Operating pressure 10 bar
- In coils

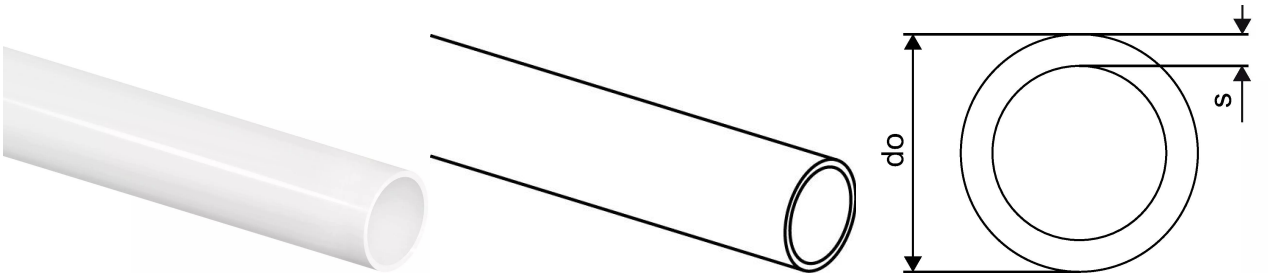

Application information GF Uponor Aqua Pipe natural PN10

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) in accordance with EN ISO 15875
- Application class 2 – hot water supply
- Fire classification E according to DIN EN 13501-1
- Operating pressure up to 6 bar (PN6), depending on variant
- Available as plain pipe or pipe in protective conduit

Application

- Tap water installations for hot and cold water distribution
- Permanent operating temperature from 0 °C to 70 °C
- Short-term malfunction temperature up to 95 °C for a total of 100 hours over the service life

GF Uponor Aqua Pipe natural PN10 50x6,9 50m

1008964

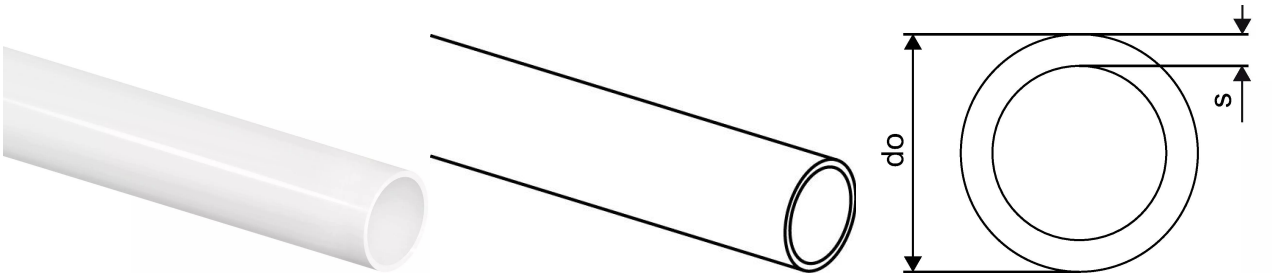

Product code

Item no EAN	7321500018269
Item no GF	35001008964
Item no GTIN	07321500018269
Item no LVI	2012552
Item no NOBB	41942880
Item no NRF	5110032
Item no RSK	2418002
Item no VVS	087210050

Dimensions

Item Unit Height	50
Item Unit Length	1000
Item Unit Weight	0,939
Item Unit Width	50
Item_UOM	m

Measurements

Outer Diameter_do	50
Wall thickness_s	6,9

Packaging

Packaging GTIN PL1	06414905255764
Packaging Height PL1	1250
Packaging Length PL1	1250
Packaging Quantity PL1	50
Packaging Type PL1	Coil
Packaging Volume PL1	0,390625
Packaging Weight PL1	46,95

Packaging Width PL1	250

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+