


Uponor Radi Pipe natural PN6 40x3,7 50m

1008979

- Operating pressure 6 bar
- Coil

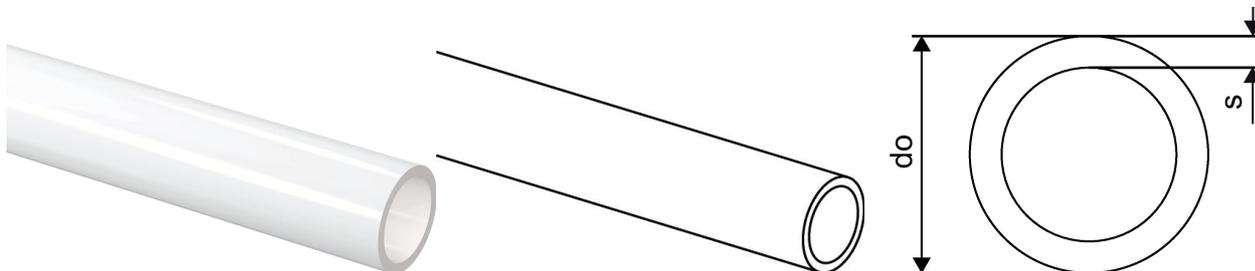

Application information Uponor Radi Pipe natural PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 40x3,7 50m

1008979

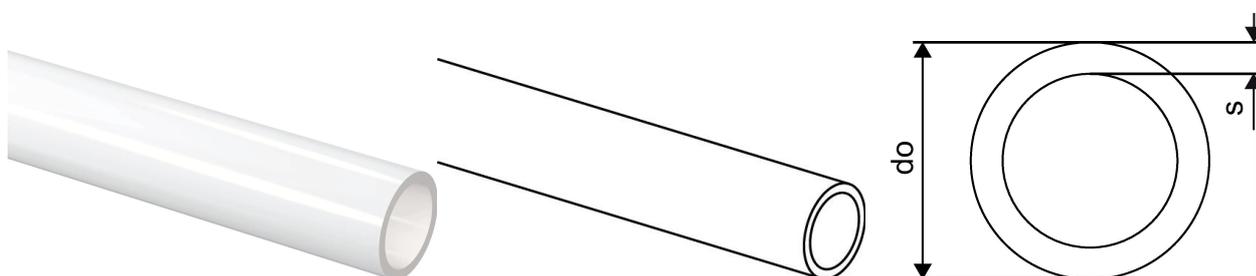

Product code

Item no EAN	7321500018474
Item no GF	35001008979
Item no GTIN	07321500018474
Item no LVI	2012140
Item no NOBB	41947133
Item no NRF	8362315
Item no RSK	2418023
Item no VVS	087230340

Dimensions

Item Unit Height	40
Item Unit Length	1000
Item Unit Weight	0,47
Item Unit Width	40
Item_UOM	m

Measurements

Outer Diameter_do	40
Wall thickness_s	3,7

Packaging

Packaging GTIN PL1	06414905255825
Packaging GTIN PL4	06414905255832
Packaging Height PL1	230
Packaging Height PL4	1710
Packaging Length PL1	1070
Packaging Length PL4	1150
Packaging Quantity PL1	50
Packaging Quantity PL4	350
Packaging Type PL1	Coil

Packaging Type PL4	Pallet
Packaging Volume PL1	0,263327
Packaging Volume PL4	2,261475
Packaging Weight PL1	23,5
Packaging Weight PL4	176
Packaging Width PL1	1070
Packaging Width PL4	1150

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com