


Uponor Radi Pipe natural PN6 63X5,8 50m

1008981

- Operating pressure 6 bar
- Coil

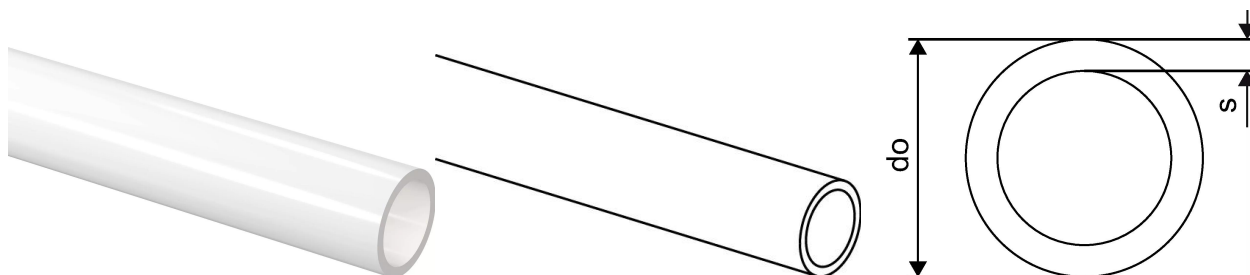

Application information Uponor Radi Pipe natural PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 63X5,8 50m

1008981

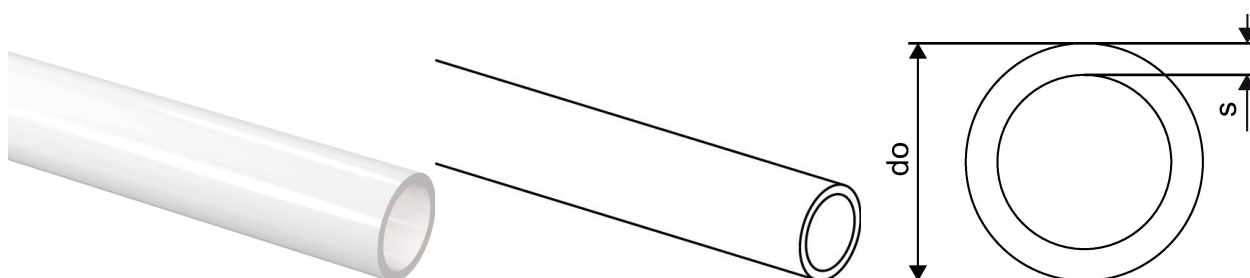

Product code

| | |
|--------------|----------------|
| Item no EAN | 7321500018498 |
| Item no GF | 35001008981 |
| Item no GTIN | 07321500018498 |
| Item no LVI | 2012165 |
| Item no NOBB | 41947152 |
| Item no NRF | 8362324 |
| Item no RSK | 2418025 |
| Item no VVS | 89523063 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 60 |
| Item Unit Length | 1000 |
| Item Unit Weight | 1,065 |
| Item Unit Width | 60 |
| Item_UOM | m |

Measurements

| | |
|-------------------|-----|
| Outer Diameter_do | 63 |
| Wall thickness_s | 5,8 |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905255863 |
| Packaging Height PL1 | 250 |
| Packaging Length PL1 | 1790 |
| Packaging Quantity PL1 | 50 |
| Packaging Type PL1 | Coil |
| Packaging Volume PL1 | 0,801025 |
| Packaging Weight PL1 | 55,8 |
| Packaging Width PL1 | 1790 |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com