


## Uponor Radi Pipe natural PN6 75x6,8 50m

1008982

- Operating pressure 6 bar
- Coil

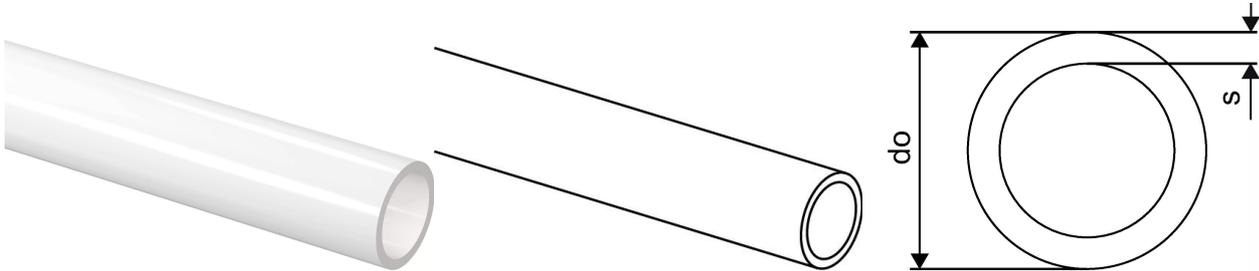

### Application information Uponor Radi Pipe natural PN6

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe natural PN6 75x6,8 50m

1008982

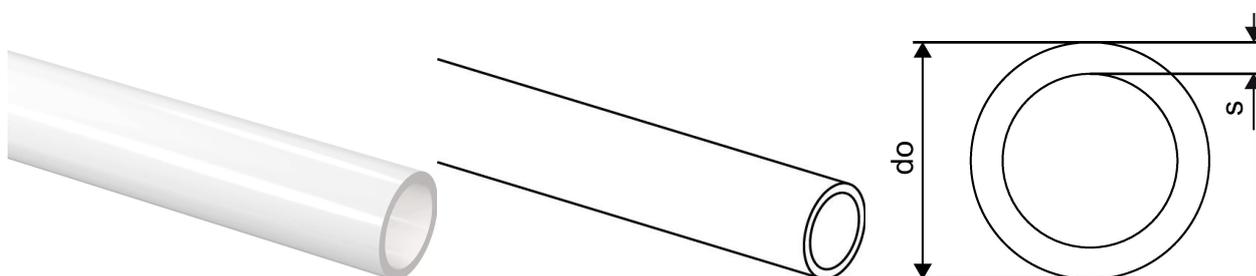

### Product code

Item no EAN	7321500018504
Item no GF	35001008982
Item no GTIN	07321500018504
Item no LVI	2012175
Item no NOBB	41947163
Item no NRF	8362328
Item no RSK	2418026
Item no VVS	087230375

### Dimensions

Item Unit Height	75
Item Unit Length	1000
Item Unit Weight	1,461
Item Unit Width	75
Item_UOM	m

### Measurements

Outer Diameter_do	75
Wall thickness_s	6,9

### Packaging

Packaging GTIN PL1	06414905255870
Packaging GTIN PL4	06414905476589
Packaging Height PL1	2150
Packaging Height PL4	1600
Packaging Length PL1	2150
Packaging Length PL4	1150
Packaging Quantity PL1	50
Packaging Quantity PL4	50
Packaging Type PL1	Coil

Packaging Type PL4	Pallet
Packaging Volume PL1	1,849
Packaging Volume PL4	2,116
Packaging Weight PL1	73,05
Packaging Weight PL4	450
Packaging Width PL1	400
Packaging Width PL4	1150

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)