


## Uponor Aqua Pipe natural in conduit black 25x3,5 34/28 50m

1008995

- Operating pressure 10 bar
- Coil
- Pipe in conduit

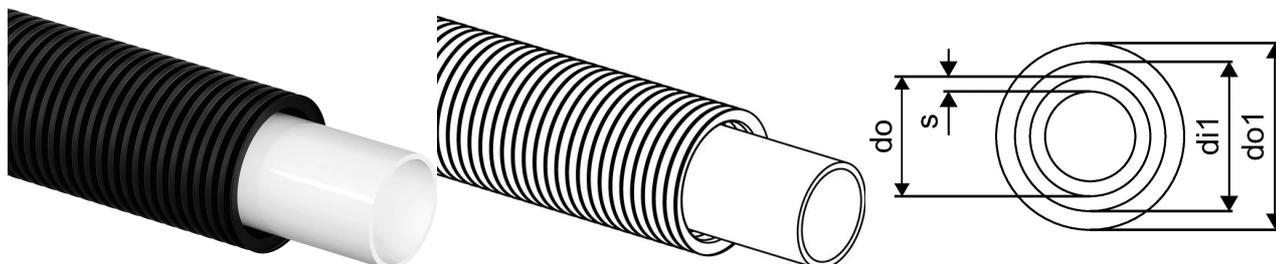

### Application information Uponor Aqua Pipe natural in conduit black

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

## Uponor Aqua Pipe natural in conduit black 25x3,5 34/28 50m

1008995

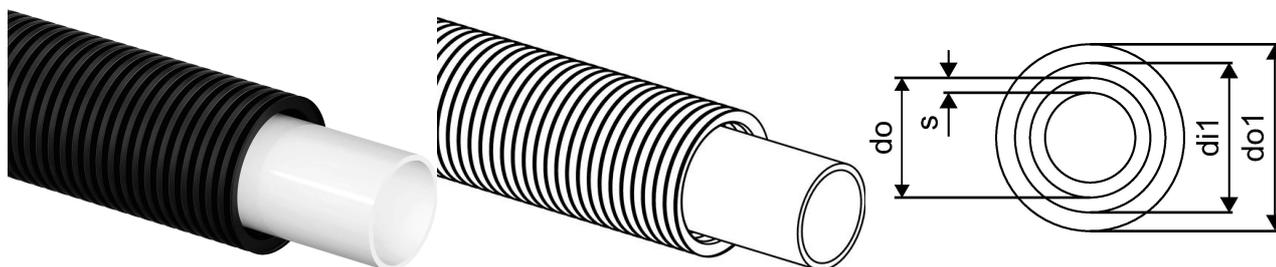

### Measurements

Inner_diameter_di1	28
Outer Diameter_do	25
Outer Diameter_do1	34
Wall thickness_s	3,5

### Product code

Item no EAN	7321500018641
Item no GF	35001008995
Item no GTIN	07321500018641

### Dimensions

Item Unit Height	34
Item Unit Length	1000
Item Unit Weight	0,354
Item Unit Width	34
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905434398
Packaging GTIN PL4	06414905488117
Packaging Height PL1	192
Packaging Height PL4	950
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	300
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,1168128
Packaging Volume PL4	0,912

Packaging Weight PL1	17,877
Packaging Weight PL4	132,262
Packaging Width PL1	780
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)