
Product data sheet



GF Uponor Aqua Pipe natural in conduit, black 25x3,5 34/28 50m

1008995

- Material: PE-Xa
- Operating pressure 10 bar
- In coils
- Pipe in conduit

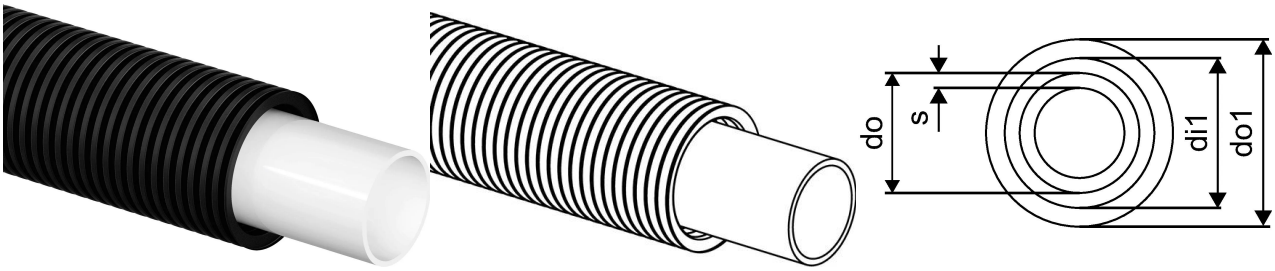

Application information GF Uponor Aqua Pipe natural in conduit, black

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) in accordance with EN ISO 15875
- Application class 2 – hot water supply
- Fire classification E according to DIN EN 13501-1
- Operating pressure up to 6 bar (PN6), depending on variant
- Available as plain pipe or pipe in protective conduit

Application

- Tap water installations for hot and cold water distribution
- Permanent operating temperature from 0 °C to 70 °C
- Short-term malfunction temperature up to 95 °C for a total of 100 hours over the service life

GF Uponor Aqua Pipe natural in conduit, black 25x3,5 34/28 50m

1008995

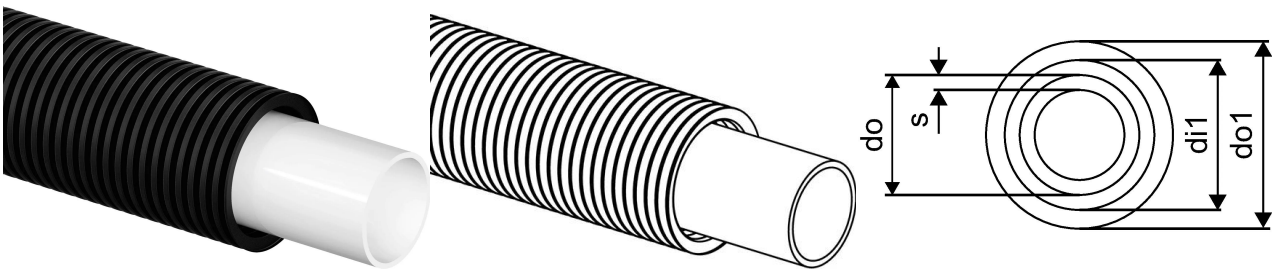

Measurements

Inner_diameter_di1	28
Outer Diameter_do	25
Outer Diameter_do1	34
Wall thickness_s	3,5

Product code

Item no EAN	7321500018641
Item no GF	35001008995
Item no GTIN	07321500018641

Dimensions

Item Unit Height	34
Item Unit Length	1000
Item Unit Weight	0,354
Item Unit Width	34
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905434398
Packaging GTIN PL4	06414905488117
Packaging Height PL1	192
Packaging Height PL4	950
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	300
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,1168128
Packaging Volume PL4	0,912
Packaging Weight PL1	17,877
Packaging Weight PL4	132,262
Packaging Width PL1	780
Packaging Width PL4	800

Documents

Page with all documents

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E communications@georgfischer.com

www.uponor.com

+GF+