


Uponor Comfort Pipe PLUS 17x2,0 240m

1009226

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

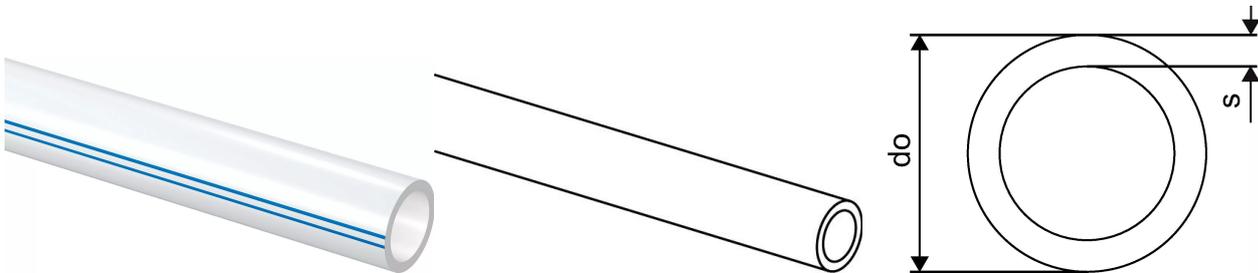

Application information Uponor Comfort Pipe PLUS

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 90°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

Uponor Comfort Pipe PLUS 17x2,0 240m

1009226

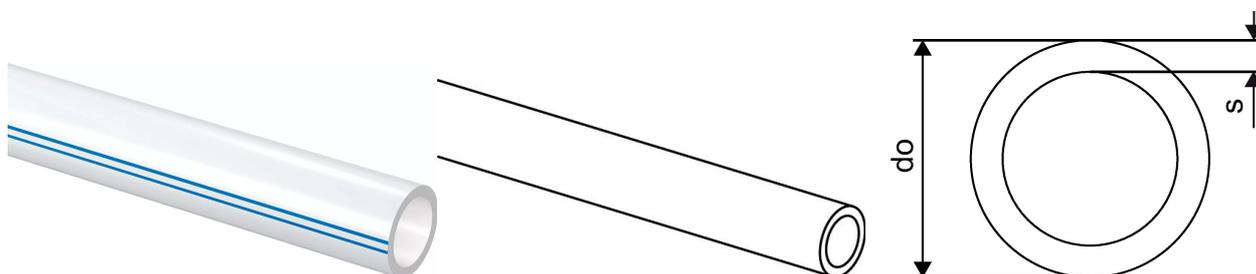

Product code

Item no EAN	7321500044466
Item no GF	35001009226
Item no GTIN	07321500044466
Item no LVI	2018112
Item no NOBB	41949437
Item no NRF	8361957
Item no RSK	2418238
Item no VVS	087217135

Dimensions

Item Unit Height	17
Item Unit Length	1000
Item Unit Weight	0,115
Item Unit Width	17
Item_UOM	m

Measurements

Outer Diameter_do	17
Wall thickness_s	2

Packaging

Packaging GTIN PL1	06414905256105
Packaging GTIN PL4	06414905256112
Packaging Height PL1	225
Packaging Height PL4	950
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	240
Packaging Quantity PL4	1200
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,13689
Packaging Volume PL4	0,912
Packaging Weight PL1	27,7
Packaging Weight PL4	167
Packaging Width PL1	780
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com