


## Uponor Comfort Pipe PLUS 20x2,0 120m

1009228

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

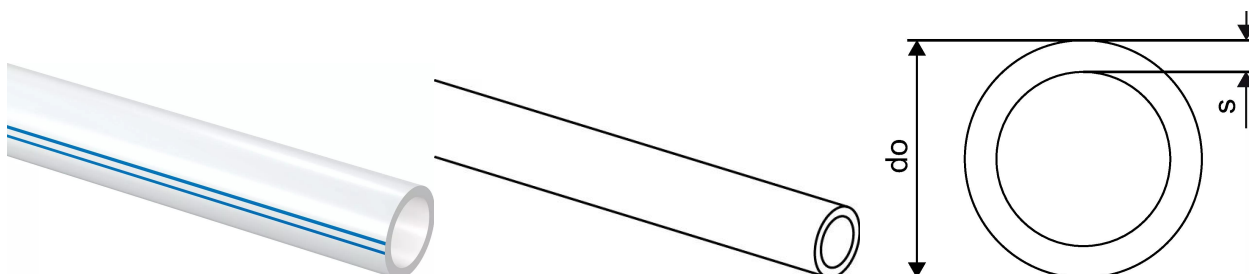

### Application information Uponor Comfort Pipe PLUS

#### Specification

- Pipe material made of peroxide cross-linked polyethylene (PE-Xa)
- Five-layer pipe construction with EVOH oxygen diffusion barrier
- Oxygen diffusion resistance according to DIN 4726
- Application class 4 and 5 according to EN ISO 15875
- Design pressure 6 bar at 70 °C
- Maximum design temperature 90 °C
- Short-term malfunction temperature up to 100 °C
- Fire classification E according to DIN EN 13501-1
- Available in multiple diameters and coil lengths
- Variants available with insulation and fire-resistant versions

#### Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds
- for dry-build systems
- TABS

## Uponor Comfort Pipe PLUS 20x2,0 120m

1009228



### Product code

Item no EAN	7321500044350
Item no GF	35001009228
Item no GTIN	07321500044350
Item no LVI	2018165
Item no NOBB	41949456
Item no NRF	8361971
Item no RSK	2418241
Item no VVS	087217120

### Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,115
Item Unit Width	20
Item_UOM	m

### Measurements

Outer Diameter_do	20
Wall thickness_s	2

### Packaging

Packaging GTIN PL1	06414905256143
Packaging GTIN PL4	06414905256150
Packaging Height PL1	155
Packaging Height PL4	950
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	120
Packaging Quantity PL4	840
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,094302
Packaging Volume PL4	0,912
Packaging Weight PL1	13,9
Packaging Weight PL4	127
Packaging Width PL1	780
Packaging Width PL4	800

## Documents

Page with all documents 

### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E  
communications@georgfischer.  
com