


Uponor Comfort Pipe PLUS 20x2,0 480m

1009231

- UFH pipe made of PEX-a
- Complying with ISO 22391 and fulfils oxygen diffusion resistance as per DIN 4726
- Application class 4 and 5
- Design pressure 6 Bar at 70°C

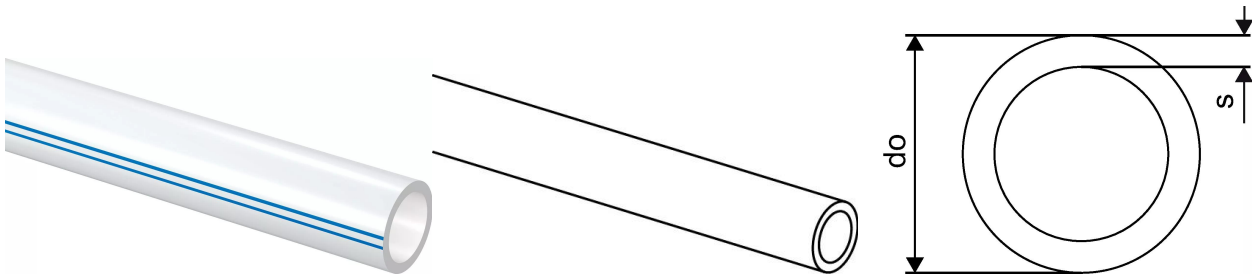

Application information Uponor Comfort Pipe PLUS

Specification

- Pipe material made of peroxide cross-linked polyethylene (PE-Xa)
- Five-layer pipe construction with EVOH oxygen diffusion barrier
- Oxygen diffusion resistance according to DIN 4726
- Application class 4 and 5 according to EN ISO 15875
- Design pressure 6 bar at 70 °C
- Maximum design temperature 90 °C
- Short-term malfunction temperature up to 100 °C
- Fire classification E according to DIN EN 13501-1
- Available in multiple diameters and coil lengths
- Variants available with insulation and fire-resistant versions

Application

- Underfloor heating and cooling systems
- for use with cement- and anhydrite-based screeds
- for dry-build systems
- TABS

Uponor Comfort Pipe PLUS 20x2,0 480m

1009231



Product code

Item no EAN	7321500044374
Item no GF	35001009231
Item no GTIN	07321500044374
Item no LVI	2018171
Item no NOBB	41949460
Item no NRF	8361975
Item no RSK	2418243
Item no VVS	087217148

Dimensions

Item Unit Height	20
Item Unit Length	1000
Item Unit Weight	0,115
Item Unit Width	20
Item_UOM	m

Measurements

Outer Diameter_do	20
Wall thickness_s	2

Packaging

Packaging GTIN PL3	06414905256204
Packaging GTIN PL4	06414905256211
Packaging Height PL3	808
Packaging Height PL4	952
Packaging Length PL3	794
Packaging Length PL4	1200
Packaging Quantity PL3	480
Packaging Quantity PL4	960
Packaging Type PL3	Box

Packaging Type PL4	Pallet
Packaging Volume PL3	0,381081888
Packaging Volume PL4	0,91392
Packaging Weight PL3	59,7
Packaging Weight PL4	114,4
Packaging Width PL3	594
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com