


Uponor Vario S actuator NC 24V FT30x1,5

1013008

- open/closed indicator
- operation at ambient temperature of up to +60°C
- protection class: IP54

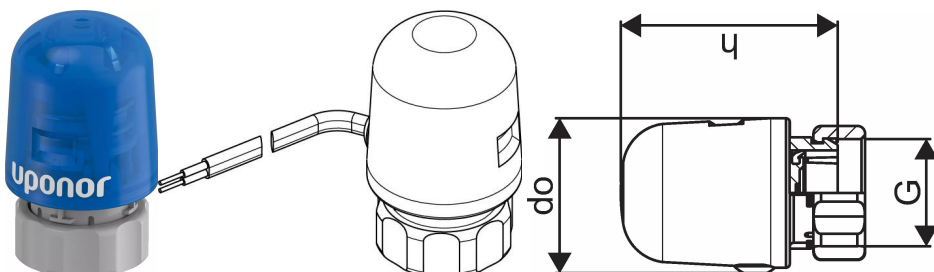

Application information Uponor Vario S actuator NC


Specification

- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S actuator NC 24V FT30x1,5
1013008

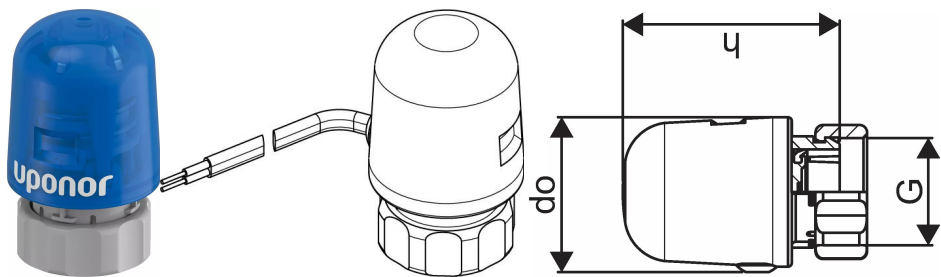

Technical data

Item (unit of measurement)	pce
Item no VVS	466234401
Item no LVI	2025234
Z-measurement h	56 mm
Packaging Quantity PL1	1
Packaging Quantity PL3	10
Packaging Quantity PL4	2000

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com