


## Uponor MLC white 14x2,0 200m

1013366

- coil
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

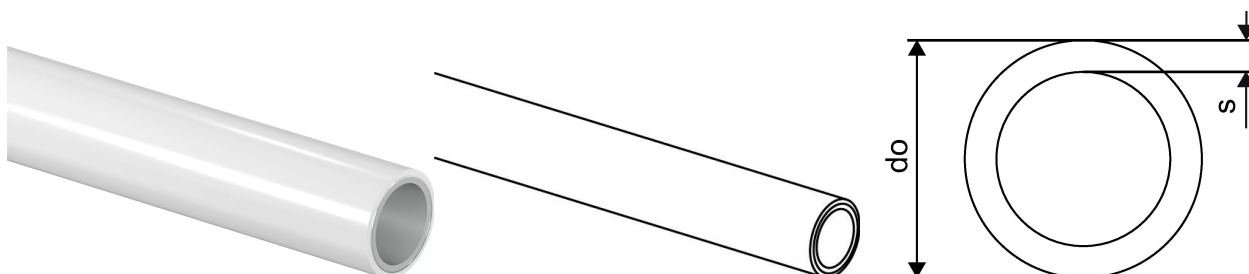

### Application information Uponor MLC white

#### Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive - longitudinally welded aluminium - adhesive - PE-RT)
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according to EN 806.

#### Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

Uponor MLC white 14x2,0 200m

1013366

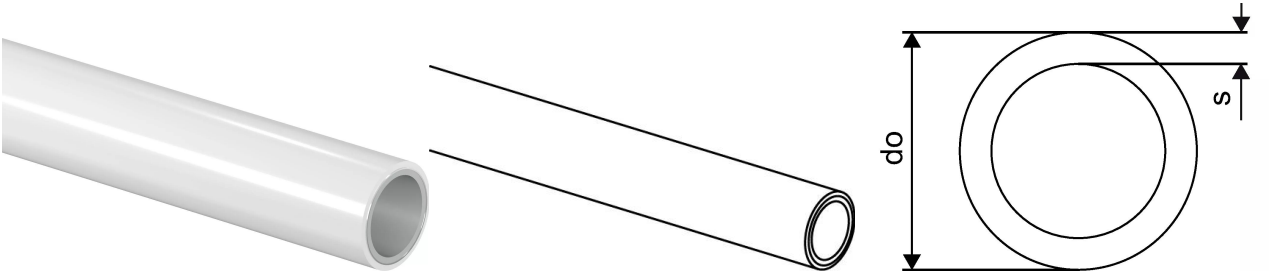

Technical data

Item (unit of measurement)	m
Item no VVS	99999999
Packaging Quantity PL1	200
Packaging Quantity PL4	2600

Documents

Page with all documents

Download icon

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com