


Uponor MLC white S 63x6,0 5m

1013451

- bar
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

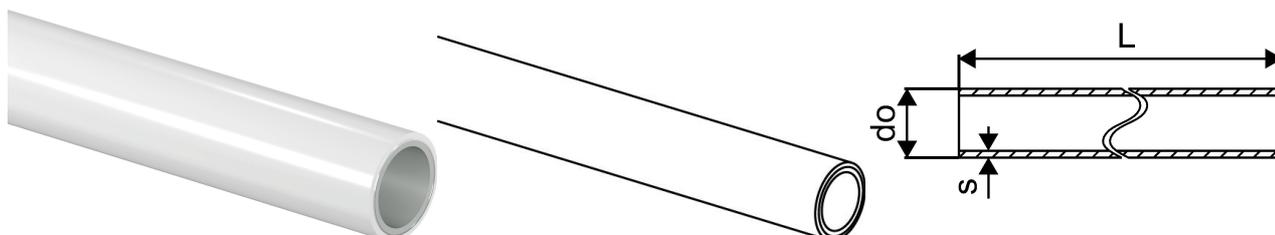

Application information Uponor MLC white S

Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive - longitudinally welded aluminium - adhesive - PE-RT)
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according to EN 806.

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor MLC white S 63x6,0 5m

1013451

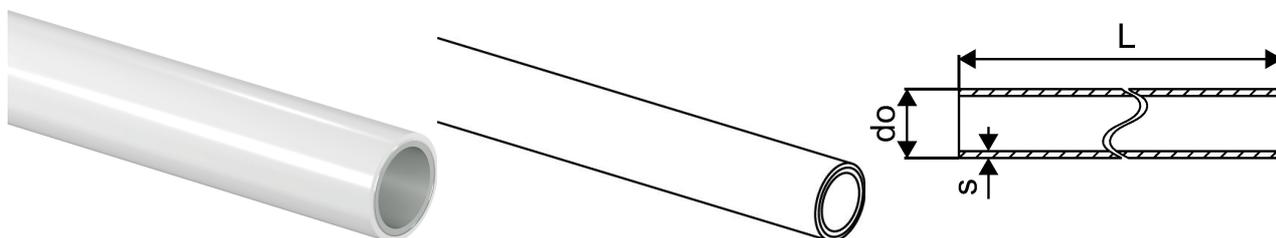

Product code

Item no EAN	4021598005594
Item no GF	35001013451
Item no GTIN	04021598005594
Item no LVI	1720109
Item no NOBB	41940061
Item no NRF	5071347
Item no RSK	1873323
Item no VVS	087306163

Dimensions

Item Unit Height	63
Item Unit Length	1000
Item Unit Weight	1,228
Item Unit Width	63
Item_UOM	m

Measurements

Outer Diameter_do	63
Wall thickness_s	6

Packaging

Packaging GTIN PL1	06414905257003
Packaging GTIN PL2	06414905257010
Packaging GTIN PL4	06414905257027
Packaging Height PL1	63
Packaging Height PL2	150
Packaging Height PL4	810
Packaging Length PL1	5000
Packaging Length PL2	5070
Packaging Length PL4	5080

Packaging Quantity PL1	5
Packaging Quantity PL2	15
Packaging Quantity PL4	420
Packaging Type PL1	Piece
Packaging Type PL2	Cover_Pipe
Packaging Type PL4	Wooden_Cage
Packaging Volume PL1	0,019845
Packaging Volume PL2	0,114075
Packaging Volume PL4	4,52628
Packaging Weight PL1	6,14
Packaging Weight PL2	26,12
Packaging Weight PL4	780
Packaging Width PL1	63
Packaging Width PL2	150
Packaging Width PL4	1100

Documents

Page with all documents 

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com