


Uponor Uni-C manifold end cap female S/SH PL G1/2"FT

1014120

- Made of plated brass
- including seal for the manifold S/SH.

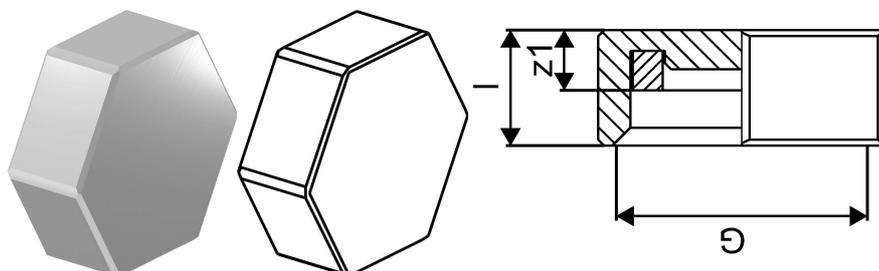

Application information Uponor Uni-C manifold end cap female S/SH PL

Specification


- Modular brass manifold system with male threaded connections
- Components made of tin-plated or plated brass; brackets in galvanised steel
- Compatible with 1/2" Uni-C compression adapters for MLC and Uni Pipe PLUS pipes
- Thread standards according to EN ISO 228-1 / DIN
- System includes manifolds, valves, end caps, plugs, brackets, couplings, and adapters

Application

- Distribution and connection of tap water
- Manifold-based installations with male threaded connections
- Adaptation between Uponor pipe systems (Uni Pipe PLUS, MLC) and Uponor 1/2" threaded components
- Use in residential and light commercial installations
- Flexible system extension via manifolds, adapters, and accessories

Uponor Uni-C manifold end cap female S/SH PL G1/2"FT

1014120

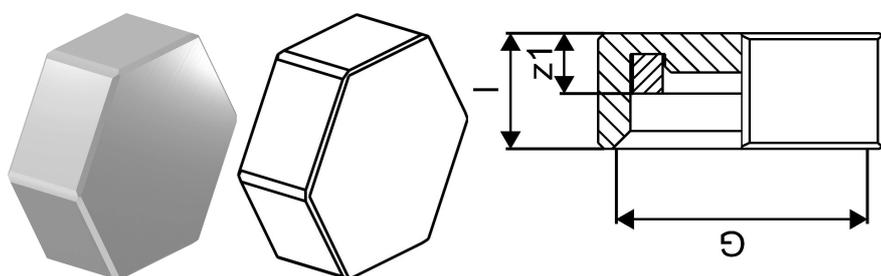

Measurements

Cylindric_thread_G	1/2
LENGTH_L	9,7
z1	5

Product code

Item no EAN	4021598701144
Item no GF	35001014120
Item no GTIN	04021598701144

Dimensions

Item Unit Height	9
Item Unit Length	23
Item Unit Weight	0,022
Item Unit Width	23
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905258765
Packaging GTIN PL3	06414905258772
Packaging GTIN PL4	06414905258789
Packaging Height PL1	89
Packaging Height PL3	95
Packaging Height PL4	744
Packaging Length PL1	176
Packaging Length PL3	175
Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL3	80
Packaging Quantity PL4	15360
Packaging Type PL1	Plastic_Bag

Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,002145968
Packaging Volume PL3	0,002244375
Packaging Volume PL4	0,71424
Packaging Weight PL1	0,44
Packaging Weight PL3	1,821
Packaging Weight PL4	349,555
Packaging Width PL1	137
Packaging Width PL3	135
Packaging Width PL4	800

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com