


## Uponor S-Press coupling 14-14

**1015154**

- Made of tin-plated brass
- Contoured Aluminium-sleeve
- Fast 3-step installation (press without bevel)
- Colour code

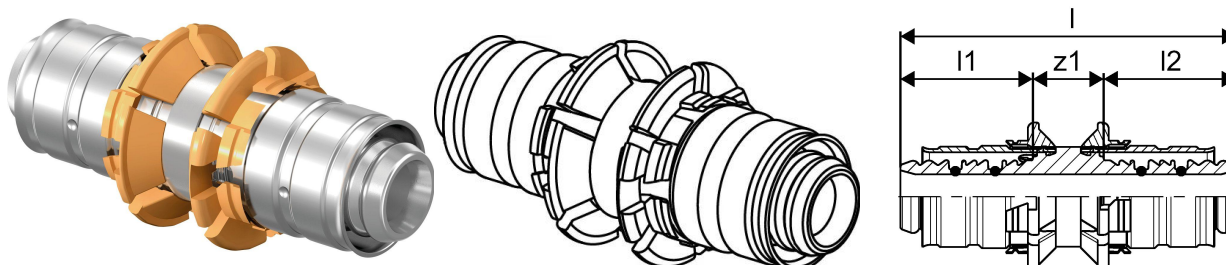

### Application information Uponor S-Press coupling

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

Uponor S-Press coupling 14-14

1015154

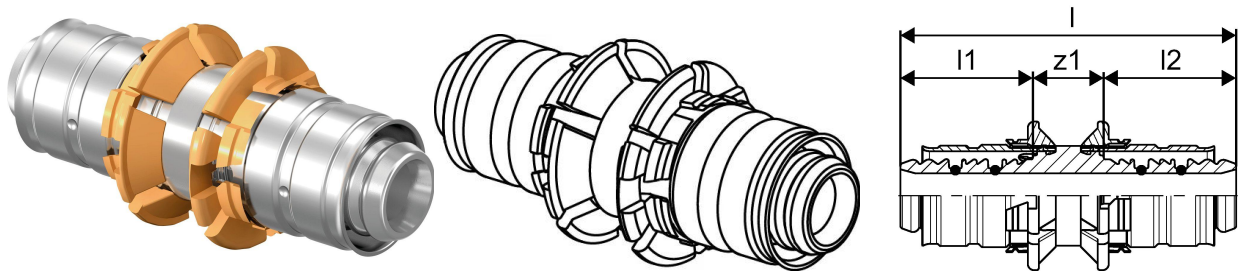

Technical data

Item (unit of measurement)	pce
Length (l)	54 mm
Length (l1)	21 mm
Length (l2)	21 mm
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	7680

Documents

Page with all documents

Download icon

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com