


Uponor Aqua Pipe natural PN6 25x2,3 100m

1017870

- Operating pressure 6 bar
- Coil

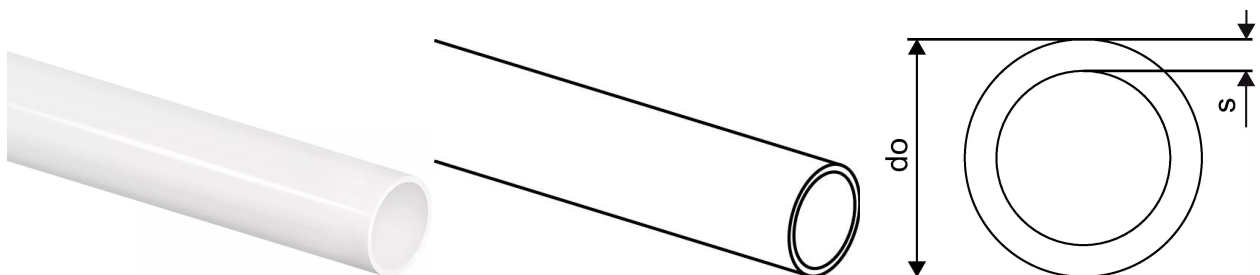

Application information Uponor Aqua Pipe natural PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural PN6 25x2,3 100m

1017870

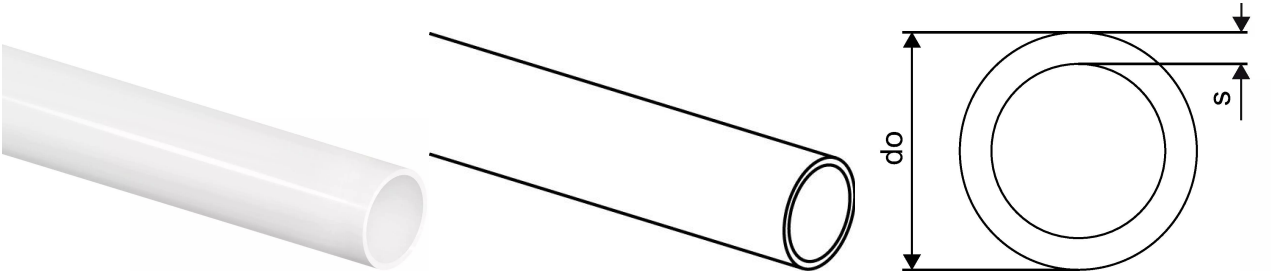

Technical data

Item (unit of measurement)	m
Packaging Quantity PL1	100
Packaging Quantity PL4	500

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com