


Uponor Ecoflex Thermo Single 25x2,3/140

1018109

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- PEX foam, HDPE casing

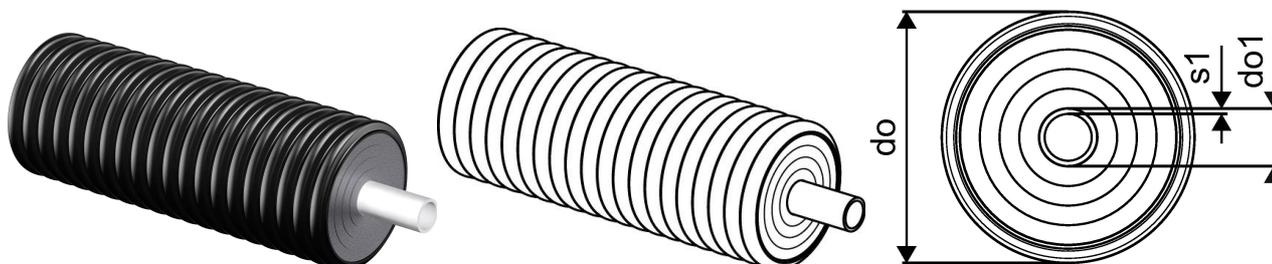

Application information Uponor Ecoflex Thermo Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11), oxygen tightness based on EN 15632.
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Thermo Single 25x2,3/140

1018109

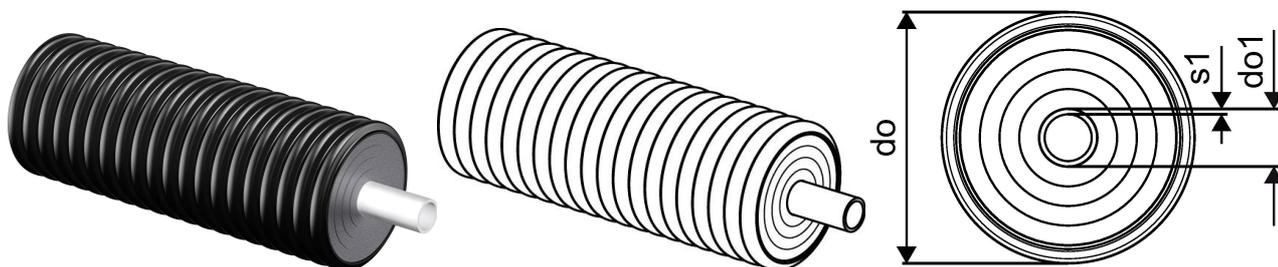

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com