


## Uponor Ecoflex Thermo Pipe Twin 2x25x2,3/175

### 1018134

- Heating and Cooling
- Two medium pipes PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- PEX foam, HDPE casing

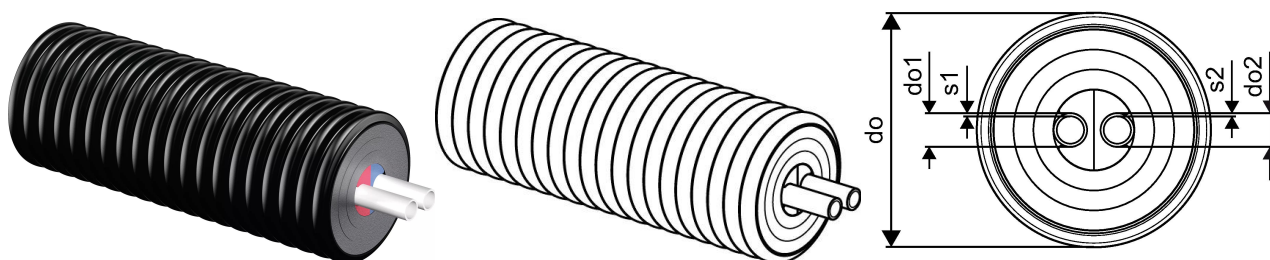

### Application information Uponor Ecoflex Thermo Pipe Twin

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632 and EN 17414.
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11), oxygen tightness based on EN 15632.
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex Thermo Pipe Twin 2x25x2,3/175

1018134

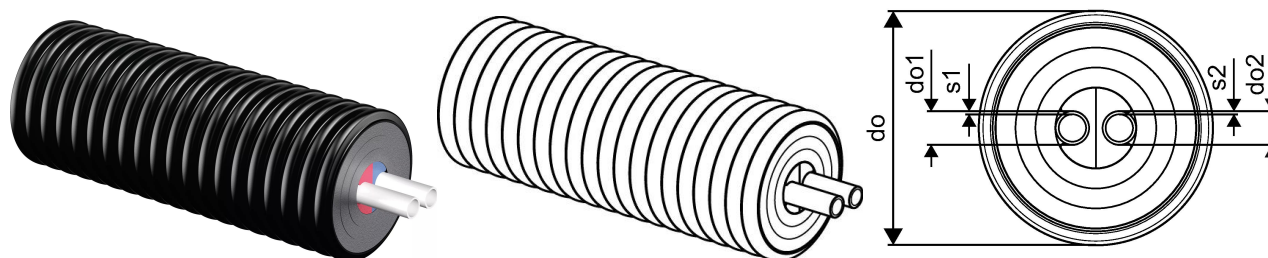

### Measurements

Bending radius M	0,5
Outer Diameter_do	175
Outer Diameter_do1	25
Outer Diameter_do2	25
Wall thickness_s1	2,3
Wall thickness_s2	2,3

### Product code

Item no EAN	6414905210251
Item no GF	35001018134
Item no GTIN	06414905210251
Item no LVI	3010232
Item no NRF	8360502
Item no RSK	2190561
Item no VVS	087809025

### Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	1,92
Item Unit Width	175
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905437368
Packaging Height PL1	2400
Packaging Length PL1	1800
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,368

Packaging Weight PL1

384

Packaging Width PL1

2400

## Documents

Page with all documents



### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

E  
communications@georgfischer.  
com