


Uponor Ecoflex Quattro 2x32x2,9-2x25x3,5/175

1018148

- Heating and warm tap water with circulation
- Four medium pipe PE-Xa, SDR 11 and 7,4
- Max. load 6 bar heating / 10 bar tap water / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion between the lines

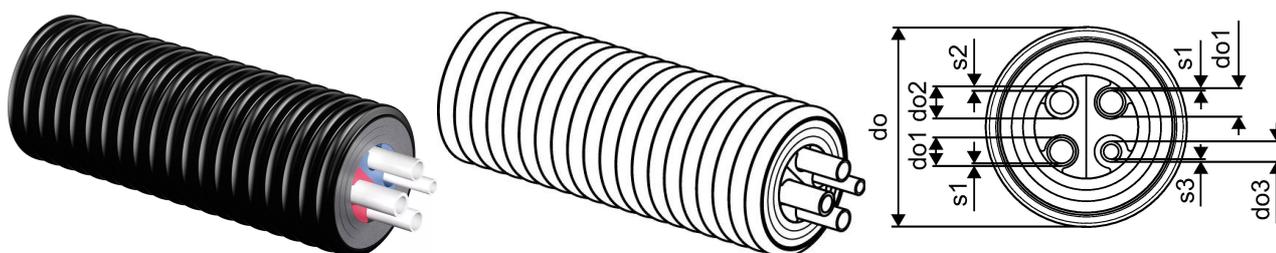

Application information Uponor Ecoflex Quattro

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) and PN10 (SDR 7,4), Oxygen tightness based on EN 15632 for heating pipes
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and warm tap water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Tap water operating temperature 70°C based on EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Quattro 2x32x2,9-2x25x3,5/175

1018148

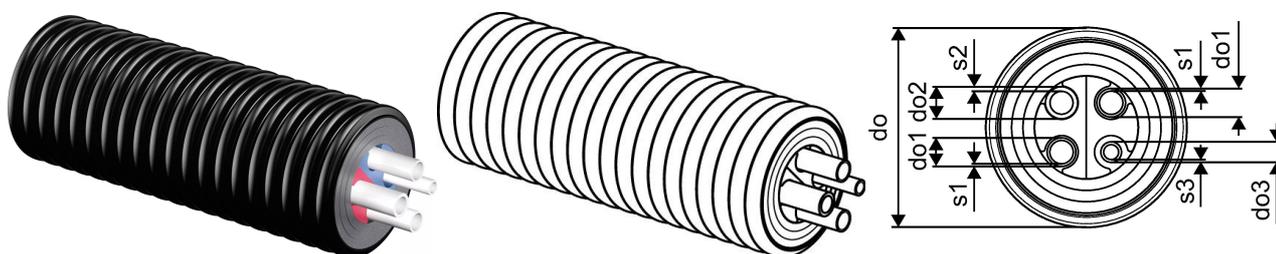

Measurements

| | |
|--------------------|-----|
| Bending radius M | 0,8 |
| Outer Diameter_do | 175 |
| Outer Diameter_do1 | 32 |
| Outer Diameter_do2 | 25 |
| Outer Diameter_do3 | 25 |
| Wall thickness_s1 | 2,9 |
| Wall thickness_s2 | 3,5 |
| Wall thickness_s3 | 3,5 |

Product code

| | |
|--------------|----------------|
| Item no EAN | 4021598111783 |
| Item no GF | 35001018148 |
| Item no GTIN | 04021598111783 |
| Item no VVS | 087817855 |

Dimensions

| | |
|------------------|------|
| Item Unit Height | 175 |
| Item Unit Length | 1000 |
| Item Unit Weight | 2,64 |
| Item Unit Width | 175 |
| Item_UOM | m |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905437467 |
| Packaging Height PL1 | 2400 |
| Packaging Length PL1 | 1800 |
| Packaging Quantity PL1 | 200 |
| Packaging Type PL1 | Coil |
| Packaging Volume PL1 | 10,368 |
| Packaging Weight PL1 | 528 |

Packaging Width PL1

2400

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com