


Uponor Wipex coupling PN6 25x2,3-G1

1018328

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

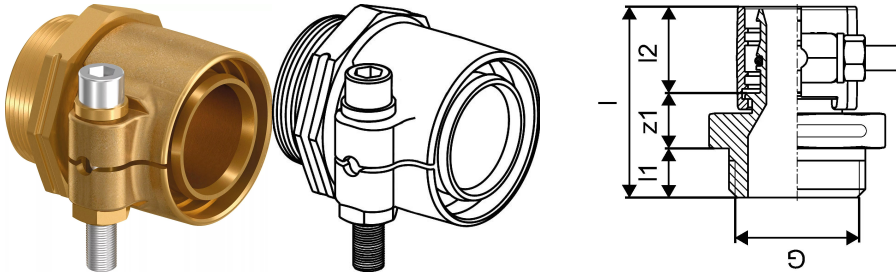

Application information Uponor Wipex coupling PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex coupling PN6 25x2,3-G1

1018328

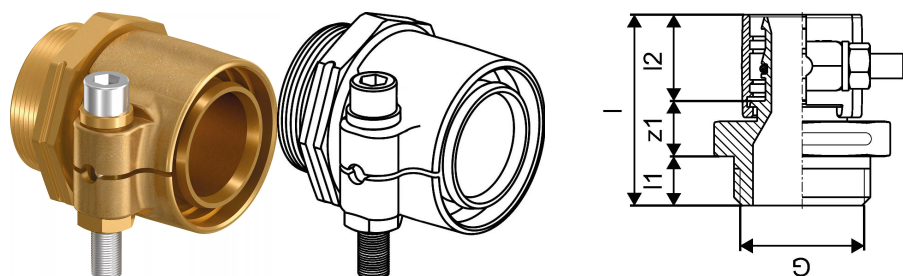

Measurements

Cylindric_thread_G	1
LENGTH_L	47
Length (l1)	12
Length (l2)	21
Wall thickness_s	2,3
z1	14

Product code

Item no EAN	7331541099981
Item no GF	35001018328
Item no GTIN	07331541099981
Item no LVI	1932025
Item no NOBB	41947273
Item no NRF	8362404
Item no RSK	2410664
Item no VVS	087883025

Dimensions

Item Unit Height	46
Item Unit Length	42
Item Unit Weight	0,19
Item Unit Width	40
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905259588
Packaging GTIN PL3	06414905259601
Packaging Height PL1	48
Packaging Height PL3	145
Packaging Length PL1	44

Packaging Length PL3	268
Packaging Quantity PL1	1
Packaging Quantity PL3	40
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Volume PL1	0,000088704
Packaging Volume PL3	0,009715
Packaging Weight PL1	0,198
Packaging Weight PL3	7,78
Packaging Width PL1	42
Packaging Width PL3	250

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E
communications@georgfischer.
com